



AIR QUALITY PROGRAM
301 39th Street, Bldg. #7
Pittsburgh, PA 15201-1811

Title V Operating Permit
& Federally Enforceable State Operating Permit

Issued To: Sunoco Partners Marketing &
Terminals, L.P.

Facility: Sunoco Logistics Pittsburgh Terminal
5733 Butler Street
Pittsburgh, PA 15201

ACHD Permit #: 0007-OP20

Date of Issuance: Month 00, 20XX

Expiration Date: Month 00,20XX

Renewal Date: date – 6mo.

Issued By: _____
JoAnn Truchan, P.E.
Section Chief, Engineering

Prepared By: _____
Hafeez Ajenifuja
Air Quality Engineer

[This page left intentionally blank]

TABLE OF CONTENTS

I.	CONTACT INFORMATION.....	4
II.	FACILITY DESCRIPTION.....	5
III.	GENERAL CONDITIONS – MAJOR SOURCE	7
IV.	SITE LEVEL TERMS AND CONDITIONS.....	17
V.	EMISSION UNIT LEVEL TERMS AND CONDITIONS.....	24
	A. PROCESS P001: GASOLINE AND ETHANOL TANK TRUCK LOADING	24
	B. STORAGE TANKS: T001 AND T002	35
	C. STORAGE TANKS: T003, T004 AND T321.....	38
	D. STORAGE TANK NO. 6	45
VI.	MISCELLANEOUS	50
	A. TWO HORIZONTAL ABOVEGROUND STORAGE TANKS, ONE 20,000 GALLON, T005 AND ONE 10,000 GALLON, T007:	50
	B. THREE 20,000 GALLON FRAC TANKS:.....	50
	C. ONE 60,000 GALLON BUTANE TANK:	50
	D. TWO OIL WATER SEPARATORS, ONE UNDERGROUND 10,000 GALLON AND ONE 120,000 GALLON OPENED TOP:	51
	E. ONE 2.01 MMBTU/HR BOILER FIRED WITH NATURAL GAS:	51
VII.	ALTERNATIVE OPERATING SCENARIOS	53
VIII.	EMISSIONS LIMITATIONS SUMMARY	54

AMENDMENTS:

<i>DATE</i>	<i>SECTION(S)</i>
--------------------	--------------------------

I. CONTACT INFORMATION

Facility Location: Sunoco Logistics Pittsburgh Terminal
5733 Butler Street
Pittsburgh, PA 15201

Permittee/Owner: Sunoco Partners Marketing & Terminals, L.P.
5733 Butler Street
Pittsburgh, PA 15201

Responsible Official: Adam Bechtell
Title: Terminal Manager
Company: Sunoco Partners Marketing & Terminals, L.P.
Address: 5733 Butler Street
Pittsburgh, PA 15201

Telephone Number: (412) 784-3460
Fax Number: (412) 784-3465

Facility Contact: Sion Lauren
Title: Environmental Specialist
Telephone Number: (412) 784-3474
Fax Number: (844) 613-9231
E-mail Address: Lauren.Sion@EnergyTransfer.com

AGENCY ADDRESSES:

ACHD Engineer: Hafeez Ajenifuja
Title: Air Quality Engineer
Telephone Number: 412-578-8366
Fax Number: 412-578-8144
E-mail Address: Hafeez.Ajenifuja@AlleghenyCounty.US

ACHD Contact: Chief Engineer
Allegheny County Health Department
Air Quality Program
301 39th Street, Building #7
Pittsburgh, PA 15201-1811

EPA Contact: Enforcement Programs Section (3AP12)
USEPA Region III
1650 Arch Street
Philadelphia, PA 19103-2029

II. FACILITY DESCRIPTION

Sunoco Partners Marketing & Terminals, LP's, Pittsburgh terminal is an aboveground bulk material storage tank distribution facility for petroleum products, with an average daily, design throughput of 1,250,000 gallons/day. The Pittsburgh terminal receives bulk petroleum products, such as gasoline and ethanol from the distribution pipeline and rail tank car off-loading facility and stores them in one of the five Aboveground Storage Tanks (ASTs) with internal floating roofs. Petroleum liquids and distillate products are transferred from the ASTs to the Truck Loading Rack (TLR) for the loading of tanker trucks. Hydrocarbon vapors are transferred from the tanker trucks through the TLR to the Vapor Recovery Unit (VRU).

The facility is a major source of Volatile Organic Compounds (VOCs) and a minor source of Particulate matter (PM), Particulate Matter < 10 microns in diameter (PM₁₀), Sulfur Dioxide (SO₂), Nitrogen Oxides (NO_x), Carbon Monoxide (CO) and Hazardous Air Pollutants (HAPs) as defined in section 2101.20 of Article XXI.


The emission units regulated by this permit are summarized in Table II-1:

TABLE II-1: Emission Unit Identification

I.D.	SOURCE DESCRIPTION	CONTROL DEVICE(S)	MAXIMUM CAPACITY	FUEL/RAW MATERIAL	STACK I.D.
P001	Truck loading rack with four bays and eleven loading arms	Activated Carbon Adsorption/ Gasoline Absorption VRU	1,250,000 Gals/day	Gasoline and Ethanol	S001
T001	Aboveground Storage Tank	Internal Floating Roof	3,439,800 gallons	Gasoline	NA
T002	Aboveground Storage Tank	Internal Floating Roof	2,268,000 gallons	Gasoline	NA
T003	Aboveground Storage Tank	Internal Floating Roof	2,809,900 gallons	Gasoline	NA
T004	Aboveground Storage Tank	Internal Floating Roof	168,000 gallons	Ethanol / Aviation Gasoline	NA
T321	Aboveground Storage Tank	Internal Floating Roof	126,830 gallons	Ethanol / Aviation Gasoline	NA
T006	Aboveground Storage Tank	Internal Floating Roof	1,065,204 gallons	Gasoline	NA
T005	Aboveground Storage Tank		20,000 gallons	Gasoline	NA
T007	Aboveground Storage Tank		20,000 gallons	Gasoline	NA

Process Flow Diagram

Facility Process Diagram:

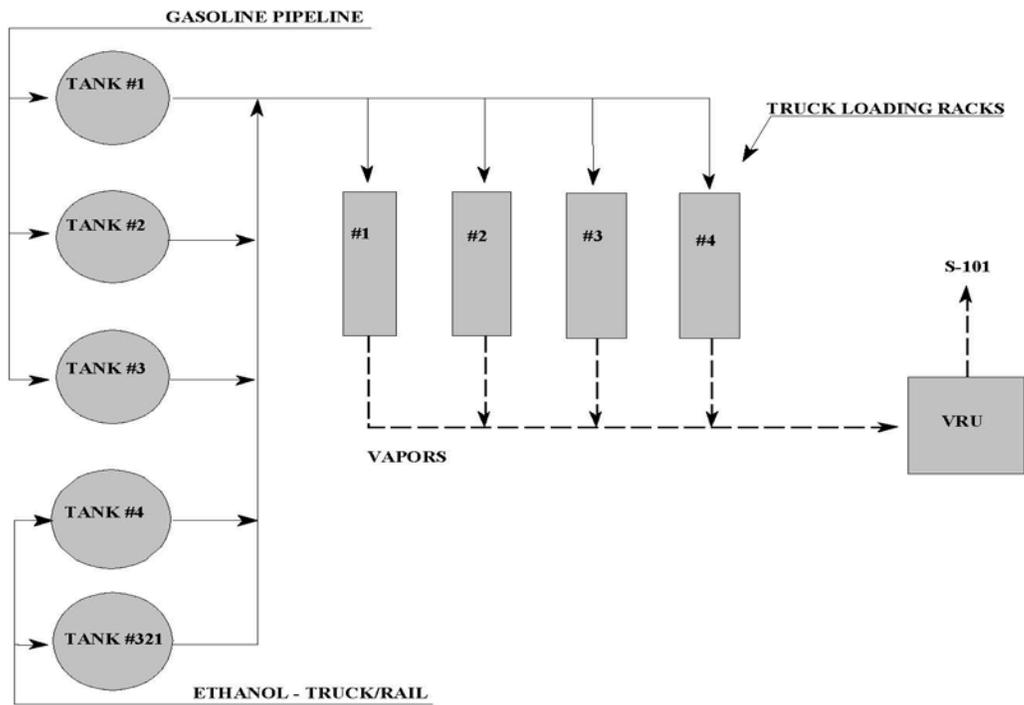

Sunoco Pittsburgh TVOPr.doc

DECLARATION OF POLICY

Pollution prevention is recognized as the preferred strategy (over pollution control) for reducing risk to air resources. Accordingly, pollution prevention measures should be integrated into air pollution control programs wherever possible, and the adoption by sources of cost-effective compliance strategies, incorporating pollution prevention, is encouraged. The Department will give expedited consideration to any permit modification request based on pollution prevention principles.

The permittee is subject to the terms and conditions set forth below. These terms and conditions constitute provisions of Allegheny County Health Department Rules and Regulations, Article XXI Air Pollution Control. The subject equipment has been conditionally approved for operation. The equipment shall be operated in conformity with the plans, specifications, conditions, and instructions which are part of your application, and may be periodically inspected for compliance by the Department. In the event that the terms and conditions of this permit or the applicable provisions of Article XXI conflict with the application for this permit, these terms and conditions and the applicable provisions of Article XXI shall prevail. Additionally, nothing in this permit relieves the permittee from the obligation to comply with all applicable Federal, State and Local laws and regulations.

III. GENERAL CONDITIONS – Major Source**1. Prohibition of Air Pollution (§2101.11)**

It shall be a violation of this permit to fail to comply with, or to cause or assist in the violation of, any requirement of this permit, or any order or permit issued pursuant to authority granted by Article XXI. The permittee shall not willfully, negligently, or through the failure to provide and operate necessary control equipment or to take necessary precautions, operate any source of air contaminants in such manner that emissions from such source:

- a. Exceed the amounts permitted by this permit or by any order or permit issued pursuant to Article XXI;
- b. Cause an exceedance of the ambient air quality standards established by Article XXI §2101.10; or
- c. May reasonably be anticipated to endanger the public health, safety, or welfare.

2. Definitions (§2101.20)

- a. Except as specifically provided in this permit, terms used retain the meaning accorded them under the applicable provisions and requirements of Article XXI or the applicable federal or state regulation. Whenever used in this permit, or in any action taken pursuant to this permit, the words and phrases shall have the meanings stated, unless the context clearly indicates otherwise.
- b. Unless specified otherwise in this permit or in the applicable regulation, the term “year” shall mean any twelve (12) consecutive months.

3. Conditions (§2102.03.c)

It shall be a violation of this permit giving rise to the remedies provided by Article XXI §2109.02, for any person to fail to comply with any terms or conditions set forth in this permit.

4. Certification (§2102.01)

Any report, or compliance certification submitted under this permit shall contain written certification by a responsible official as to truth, accuracy, and completeness. This certification and any other certification required under this permit shall be signed by a responsible official of the source, and shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and complete.

5. Transfers (§2102.03.e)

This permit shall not be transferable from one person to another, except in accordance with Article XXI §2102.03.e and in cases of change-in-ownership which are documented to the satisfaction of the Department, and shall be valid only for the specific sources and equipment for which this permit was issued. The transfer of permits in the case of change-in-ownership may be made consistent with the administrative permit amendment procedure of Article XXI §2103.14.b. The required documentation and fee must be received by the Department at least 30 days before the intended transfer date.

6. Term (§2103.12.e, §2103.13.a)

- a. This permit shall remain valid for five (5) years from the date of issuance, or such other shorter period if required by the Clean Air Act, unless revoked. The terms and conditions of an expired permit shall automatically continue pending issuance of a new operating permit provided the permittee has submitted a timely and complete application and paid applicable fees required under Article XXI Part C, and the Department through no fault of the permittee is unable to issue or deny a new permit before the expiration of the previous permit.
- b. Expiration. Permit expiration terminates the source's right to operate unless a timely and complete renewal application has been submitted consistent with the requirements of Article XXI Part C.

7. Need to Halt or Reduce Activity Not a Defense (§2103.12.f.2)

It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

8. Property Rights (§2103.12.f.4)

This permit does not convey any property rights of any sort, or any exclusive privilege.

9. Duty to Provide Information (§2103.12.f.5)

- a. The permittee shall furnish to the Department in writing within a reasonable time, any information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of any records required to be kept by the permit.
- b. Upon cause shown by the permittee the records, reports, or information, or a particular portion thereof, claimed by the permittee to be confidential shall be submitted to the Department in accordance with the requirements of Article XXI, §2101.07.d.4. Information submitted to the Department under a claim of confidentiality, shall be available to the US EPA and the PADEP upon

request and without restriction. Upon request of the permittee the confidential information may be submitted to the USEPA and PADEP directly. Emission data or any portions of any draft, proposed, or issued permits shall not be considered confidential.

10. Modification of Section 112(b) Pollutants which are VOCs or PM10 (§2103.12.f.7)

Except where precluded under the Clean Air Act or federal regulations promulgated under the Clean Air Act, if this permit limits the emissions of VOCs or PM10 but does not limit the emissions of any hazardous air pollutants, the mixture of hazardous air pollutants which are VOCs or PM10 can be modified so long as no permit emission limitations are violated. A log of all mixtures and changes shall be kept and reported to the Department with the next report required after each change.

11. Right to Access (§2103.12.h.2)

Upon presentation of credentials and other documents as may be required by law, the permittee shall allow authorized Department and other federal, state, county, and local government representatives to:

- a. Enter upon the permittee's premises where a permitted source is located or an emissions-related activity is conducted, or where records are or should be kept under the conditions of the permit;
- b. Have access to, copy and remove, at reasonable times, any records that must be kept under the conditions of the permit;
- c. Inspect at reasonable times any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under the permit; and
- d. As authorized by either Article XXI or the Clean Air Act, sample or monitor at reasonable times substances or parameters for the purpose of assuring compliance with the permit or other applicable requirements.

12. Certification of Compliance (§2103.12.h.5.)

- a. The permittee shall submit on an annual basis, certification of compliance with all terms and conditions contained in this permit, including emission limitations, standards, or work practices. The certification of compliance shall be made consistent with General Condition III.4 above and shall include the following information at a minimum:
 - 1) The identification of each term or condition of the permit that is the basis of the certification;
 - 2) The compliance status;
 - 3) Whether any noncompliance was continuous or intermittent;
 - 4) The method(s) used for determining the compliance status of the source, currently and over the reporting period consistent with the provisions of this permit; and
 - 5) Such other facts as the Department may require to determine the compliance status of the source.
- b. All certifications of compliance must be submitted to the Administrator as well as the Department by August 31 of each year for the time period beginning July 1 of the previous year and ending June 30 of the same year. Compliance certifications may be emailed to the Administrator at R3_APD_Permits@epa.gov and to the Department at AQReports@alleghenycounty.us in lieu of mailing a hard copy.

13. Record Keeping Requirements (§2103.12.j.1)

- a. The permittee shall maintain records of required monitoring information that include the following:
 - 1) The date, place as defined in the permit, and time of sampling or measurements;
 - 2) The date(s) analyses were performed;
 - 3) The company or entity that performed the analyses;
 - 4) The analytical techniques or methods used;
 - 5) The results of such analyses; and
 - 6) The operating parameters existing at the time of sampling or measurement.
- b. The permittee shall maintain and make available to the Department, upon request, records including computerized records that may be necessary to comply with the reporting and emission statements in Article XXI §2108.01.e. Such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

14. Retention of Records (§2103.12.j.2)

The permittee shall retain records of all required monitoring data and support information for a period of at least five (5) years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings for continuous monitoring instrumentation, and copies of all reports required by this permit.

15. Reporting Requirements (§2103.12.k)

- a. The permittee shall submit reports of any required monitoring at least every six (6) months. All instances of deviations from permit requirements must be clearly identified in such reports. All required reports must be certified by the Responsible Official.
- b. Prompt reporting of deviations from permit requirements is required, including those attributable to upset conditions as defined in this permit and Article XXI §2108.01.c, the probable cause of such deviations, and any corrective actions or preventive measures taken.
- c. All reports submitted to the Department shall comply with the certification requirements of General Condition III.4 above.
- d. Semiannual reports required by this permit shall be submitted to the Department as follows:
 - 1) One semiannual report is due by July 31 of each year for the time period beginning January 1 and ending June 30.
 - 2) One semiannual report is due by February 1 of each year for the time period beginning July 1 and ending December 31.
 - 3) The next semiannual report is due by February 1 of the year for the time period beginning July 1 and ending December 31
- e. Reports may be submitted electronically to the Administrator at R3_APD_Permits@epa.gov and to the Department at AQReports@alleghenycounty.us. Certification by the responsible official in accordance with General Condition III.4 above shall be provided separately via hard copy.

16. Severability Requirement (§2103.12.l)

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

17. Existing Source Reactivations (§2103.13.d)

The permittee shall not reactivate any source that has been out of operation or production for a period of one year or more unless the permittee has submitted a reactivation plan request to, and received a written reactivation plan approval from, the Department. Existing source reactivations shall meet all requirements of Article XXI §2103.13.d.

18. Administrative Permit Amendment Procedures (§2103.14.b)

An administrative permit amendment may be made consistent with the procedures of Article XXI §2103.14.b and §2103.24.b. Administrative permit amendments are not authorized for any amendment precluded by the Clean Air Act or the regulations there under.

19. Revisions and Minor Permit Modification Procedures (§2103.14.c)

Sources may apply for revisions and minor permit modifications on an expedited basis in accordance with Article XXI §2103.14.c and §2103.24.a.

20. Significant Permit Modifications (§2103.14.d)

Significant permit modifications shall meet all requirements of the applicable subparts of Article XXI, Part C, including those for applications, fees, public participation, review by affected States, and review by EPA, as they apply to permit issuance and permit renewal. The approval of a significant permit modification, if the entire permit has been reopened for review, shall commence a new full five (5) year permit term. The Department shall take final action on all such permits within nine (9) months following receipt of a complete application.

21. Duty to Comply (§2103.12.f.1)

The permittee shall comply with all permit conditions and all other applicable requirements at all times. Any permit noncompliance constitutes a violation of the Clean Air Act, the Air Pollution Control Act, and Article XXI and is grounds for any and all enforcement action, including, but not limited to, permit termination, revocation and reissuance, or modification, and denial of a permit renewal application.

22. Renewals (§2103.13.b.)

Renewal of this permit is subject to the same fees and procedural requirements, including those for public participation and affected State and EPA review, that apply to initial permit issuance. The application for renewal shall be submitted at least six (6) months but not more than eighteen (18) months prior to expiration of this permit. The application shall also include submission of a supplemental compliance review as required by Article XXI §2102.01.

23. Reopenings for Cause (§2103.15, §2103.12.f.3)

- a. This permit shall be reopened and reissued under any of the following circumstances:
- 1) Additional requirements under the Clean Air Act become applicable to a major source with a remaining permit term of three (3) or more years. No such reopening is required if the effective date of the requirement is later than the date on which the permit is due to expire, unless the original permit or any of its terms and conditions has been extended solely due to the failure of the Department to act on a permit renewal application in a timely fashion.
 - 2) Additional requirements, including excess emissions requirements, become applicable to an affected source under the acid rain program. Upon approval by the Administrator, excess emissions offset plans shall be deemed to be incorporated into this permit.
 - 3) The Department or EPA determines that this permit contains a material mistake or that inaccurate statements were made in establishing the emissions standards or other terms or conditions of this permit.
 - 4) The Administrator or the Department determines that this permit must be reissued or revoked to assure compliance with the applicable requirements.
- b. This permit may be modified; revoked, reopened, and reissued; or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any permit condition. No permit revision shall be required, under any approved economic incentives, marketable permits, emissions trading, and other similar programs or processes, for changes that are provided for in this permit.

24. Reopenings for Cause by the EPA (§2103.25.b)

This permit may be modified, reopened and reissued, revoked or terminated for cause by the EPA in accordance with procedures specified in Article XXI §2103.25.b.

25. Annual Operating Permit Administration Fee (§2103.40)

In each year during the term of this permit, on or before the last day of the month in which the application for this permit was submitted, the permittee shall submit to the Department, in addition to any other applicable administration fees, an Annual Operating Permit Administration Fee in accordance with §2103.40. by check or money order payable to the "Allegheny County Air Pollution Control Fund" in the amount specified in the fee schedule applicable at that time.

26. Annual Major Source Emissions Fees Requirements (§2103.41)

No later than September 1 of each year, the permittee shall pay an annual emission fee in accordance with Article XXI §2103.41 for each ton of a regulated pollutant (except for carbon monoxide) actually emitted from the source. The permittee shall not be required to pay an emission fee for emissions of more than 4,000 tons of each regulated pollutant. The emission fee shall be increased in each year after 1995 by the percentage, if any, by which the Consumer Price Index for the most recent calendar year exceeds the Consumer Price Index for the previous calendar year.

27. Other Requirements not Affected (§2104.08, §2105.02)

Compliance with the requirements of this permit shall not in any manner relieve any person from the duty to fully comply with any other applicable Federal, State, or County statute, rule, regulation, or the like,

including but not limited to the odor emission standards under Article XXI §2104.04, any applicable NSPSs, NESHAPs, MACTs, or Generally Achievable Control Technology (GACT) standards now or hereafter established by the EPA, and any applicable requirements of BACT or LAER as provided by Article XXI, any condition contained in any applicable Installation or Operating Permit and/or any additional or more stringent requirements contained in an order issued to such person pursuant to Article XXI Part I.

28. Termination of Operation (§2108.01.a)

In the event that operation of any source of air contaminants is permanently terminated, the person responsible for such source shall so report, in writing, to the Department within 60 days of such termination.

29. Emissions Inventory Statements (§2108.01.e & g)

- a. Emissions inventory statements in accordance with Article XXI §2108.01.e shall be submitted to the Department by March 15 of each year for the preceding calendar year. The Department may require more frequent submittals if the Department determines that more frequent submissions are required by the EPA or that analysis of the data on a more frequent basis is necessary to implement the requirements of Article XXI or the Clean Air Act.
- b. The failure to submit any report or update within the time specified, the knowing submission of false information, or the willful failure to submit a complete report shall be a violation of this permit giving rise to the remedies provided by Article XXI §2109.02.

30. Tests by the Department (§2108.02.d)

Notwithstanding any tests conducted pursuant to Article XXI §2108.02, the Department or another entity designated by the Department may conduct emissions testing on any source or air pollution control equipment. At the request of the Department, the person responsible for such source or equipment shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance of such tests.

31. Other Rights and Remedies Preserved (§2109.02.b)

Nothing in this permit shall be construed as impairing any right or remedy now existing or hereafter created in equity, common law or statutory law with respect to air pollution, nor shall any court be deprived of such jurisdiction for the reason that such air pollution constitutes a violation of this permit.

32. Enforcement and Emergency Orders (§2109.03, §2109.05)

- a. The person responsible for this source shall be subject to any and all enforcement and emergency orders issued to it by the Department in accordance with Article XXI §2109.03, §2109.04 and §2109.05.
- b. Upon request, any person aggrieved by an Enforcement Order or Emergency Order shall be granted a hearing as provided by Article XXI §2109.03.d; provided however, that an Emergency Order shall continue in full force and effect notwithstanding the pendency of any such appeal.
- c. Failure to comply with an Enforcement Order or immediately comply with an Emergency Order shall be a violation of this permit thus giving rise to the remedies provided by Article XXI §2109.02.

33. Penalties, Fines, and Interest (§2109.07.a)

A source that fails to pay any fee required under this permit when due shall pay a civil penalty of 50% of the fee amount, plus interest on the fee amount computed in accordance with Article XXI §2109.06.a.4 from the date the fee was required to be paid. In addition, the source may have this permit revoked for failure to pay any fee required.

34. Appeals (§2109.10)

In accordance with State Law and County regulations and ordinances, any person aggrieved by an order or other final action of the Department issued pursuant to Article XXI or any unsuccessful petitioner to the Administrator under Article XXI Part C, Subpart 2, shall have the right to appeal the action to the Director in accordance with the applicable County regulations and ordinances.

35. Risk Management (§2104.08, 40 CFR Part 68)

This source, as defined in 40 CFR Part 68.3, is subject to Part 68. This stationary source shall submit a risk management plan (RMP) by the date specified in Part 68.10. This stationary source shall certify compliance with the requirements of Part 68 as part of the annual compliance certification as required by General Condition III.12 above.

36. Operational Flexibility (§2103.14.a)

- a. The owner or operator shall not make any changes at this source, including trades of increases and decreases in emissions within the permitted source, without first obtaining a permit revision for such changes, unless:
- 1) The changes do not require an Installation Permit under §2102.04 of this Article or violate the terms of an Operating Permit or an Installation Permit;
 - 2) The permit specifically allows for changes that do not cause specific emissions increases greater than a *de minimis* emission increase, and the changes do not exceed such emissions increase allowed under the permit, in accordance with General Condition III.37 below;
 - 3) The changes do not violate major source applicable requirements or contravene federally enforceable permit terms and conditions that are monitoring (including test methods), recordkeeping, reporting, or compliance certification requirements; and
 - 4) By no later than seven (7) days prior to the date on which the implementation of the proposed change is commenced, a written notification is submitted to the Department, for attachment to the Department's copy of the relevant permit, which includes:
 - a) A brief description of the change within the permitted source;
 - b) The date on which the change will occur;
 - c) The pollutants emitted; and
 - d) Any change in emissions.

37. De Minimis Emission Increases (§2103.14.e)

- a. The Department may allow, as a condition of an Operating Permit, *de minimis* emission increases from a new or existing source up to the amounts authorized in condition III.37.d below.
- b. A *de minimis* increase may not occur at a source if it either:

- 1) Increases the emissions of a pollutant regulated under Section 112 of the Clean Air Act (42 U.S.C.A. §7412) except as authorized in conditions III.37.d.4) and 5) below;
 - 2) Subjects the source to the permit requirements of Article XXI, §§2102.05, 2102.06, or 2102.07 (relating to prevention of significant deterioration of air quality and major new source and major modification review); or
 - 3) Violates an applicable requirement of this Article, the state Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under the Air Pollution Control Act or the Clean Air Act.
- c. The permittee shall provide the Department with 7 days prior written notice of any *de minimis* emission increase. The notice shall identify and describe the pollutants that will be emitted as a result of the *de minimis* emissions increase and provide emission rates in tons/year and in terms necessary to establish compliance consistent with any applicable requirement. The Department may disapprove or condition the *de minimis* emission increase at any time.
- d. Except as provided in condition III.37.e below, the maximum *de minimis* emission rate increases, as measured in tons/year, that may be authorized in the permit during the term of the permit are:
- 1) Four tons of carbon monoxide from an emissions unit during the term of the permit and 20 tons of carbon monoxide at the source during the term of the permit;
 - 2) One ton of NO_x from an emissions unit during the term of the permit and 5 tons of NO_x at the source during the term of the permit;
 - 3) One and six-tenths tons of oxides of sulfur from an emissions unit during the term of the permit and 8.0 tons of oxides of sulfur at the source during the term of the permit;
 - 4) Six-tenths of a ton of PM₁₀ from an emissions unit during the term of the permit and 3.0 tons of PM₁₀ at the source during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder, or Article XXI; and
 - 5) One ton of VOC's from an emissions unit during the term of the permit and 5 tons of VOC's at the source during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder, or Article XXI.
- e. The Department may allow, as a condition of an operating permit, installation of the minor sources exempted under §2102.04.a.5 of Article XXI.
- f. *De minimis* emission threshold levels cannot be met by offsetting emission increases with emission decreases at the same emissions unit.

38. Circumvention (§2101.14)

For purposes of determining compliance with the provisions of this permit and Article XXI, no credit shall be given to any person for any device or technique, including but not limited to the operation of any source with unnecessary amounts of air, the combining of separate sources except as specifically permitted by Article XXI and the Department, the use of stacks exceeding Good Engineering Practice height as defined by regulations promulgated by the US EPA at 40 CFR §§51.100 and 51.110 and Subpart I, and other dispersion techniques, which without reducing the amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise violate the provisions of this Article; except that, for purposes of determining compliance with Article §2104.04 concerning odors, credit for such devices or techniques, except for the use of a masking agent, may be given.

39. Duty to Supplement and Correct Relevant Facts (§2103.12.d.2)

- a. The permittee shall provide additional information as necessary to address requirements that become applicable to the source after the date it files a complete application but prior to the Department taking action on the permit application.
- b. The permittee shall provide supplementary fact or corrected information upon becoming aware that incorrect information has been submitted or relevant facts were not submitted.
- c. Except as otherwise required by this permit and Article XXI, the Clean Air Act, or the regulations thereunder, the permittee shall submit additional information as necessary to address changes occurring at the source after the date it files a complete application but prior to the Department taking action on the permit application.
- d. The applicant shall submit information requested by the Department which is reasonably necessary to evaluate the permit application.

40. Effect (§2102.03.g.)

Except as specifically otherwise provided under Article XXI, Part C, issuance of a permit pursuant to Article XXI Part B or Part C shall not in any manner relieve any person of the duty to fully comply with the requirements of this permit, Article XXI or any other provision of law, nor shall it in any manner preclude or affect the right of the Department to initiate any enforcement action whatsoever for violations of this permit or Article XXI, whether occurring before or after the issuance of such permit. Further, except as specifically otherwise provided under Article XXI Part C the issuance of a permit shall not be a defense to any nuisance action, nor shall such permit be construed as a certificate of compliance with the requirements of this permit or Article XXI.

41. Installation Permits (§2102.04.a.1.)

It shall be a violation of this permit giving rise to the remedies set forth in Article XXI Part I for any person to install, modify, replace, reconstruct, or reactivate any source or air pollution control equipment which would require an installation permit or permit modification in accordance with Article XXI Part B or Part C.

IV. SITE LEVEL TERMS AND CONDITIONS

1. Reporting of Upset Conditions (§2103.12.k.2)

The permittee shall promptly report all deviations from permit requirements, including those attributable to upset conditions as defined in Article XXI §2108.01.c, the probable cause of such deviations, and any corrective actions or preventive measures taken.

2. Visible Emissions (§2104.01.a)

Except as provided for by Article XXI §2108.01.d pertaining to a cold start, no person shall operate, or allow to be operated, any source in such manner that the opacity of visible emissions from a flue or process fugitive emissions from such source, excluding uncombined water:

- a. Equal or exceed an opacity of 20% for a period or periods aggregating more than three (3) minutes in any sixty (60) minute period; or,
- b. Equal or exceed an opacity of 60% at any time.

3. Odor Emissions (§2104.04) (County-only enforceable)

No person shall operate, or allow to be operated, any source in such manner that emissions of malodorous matter from such source are perceptible beyond the property line.

4. Materials Handling (§2104.05)

The permittee shall not conduct, or allow to be conducted, any materials handling operation in such manner that emissions from such operation are visible at or beyond the property line.

5. Operation and Maintenance (§2105.03)

All air pollution control equipment required by this permit or any order under Article XXI, and all equivalent compliance techniques approved by the Department, shall be properly installed, maintained, and operated consistently with good air pollution control practice.

6. Open Burning (§2105.50)

No person shall conduct, or allow to be conducted, the open burning of any material, except where the Department has issued an Open Burning Permit to such person in accordance with Article XXI §2105.50 or where the open burning is conducted solely for the purpose of non-commercial preparation of food for human consumption, recreation, light, ornament, or provision of warmth for outside workers, and in a manner which contributes a negligible amount of air contaminants.

7. Shutdown of Control Equipment (§2108.01.b)

- a. In the event any air pollution control equipment is shut down for reasons other than a breakdown, the person responsible for such equipment shall report, in writing, to the Department the intent to shut down such equipment at least 24 hours prior to the planned shutdown. Notwithstanding the submission of such report, the equipment shall not be shut down until the approval of the Department is obtained; provided, however, that no such report shall be required if the source(s)

served by such air pollution control equipment is also shut down at all times that such equipment is shut down.

- b. The Department shall act on all requested shutdowns as promptly as possible. If the Department does not take action on such requests within ten (10) calendar days of receipt of the notice, the request shall be deemed denied, and upon request, the owner or operator of the affected source shall have a right to appeal in accordance with the provisions of Article XI.
- c. The prior report required by Site Level Condition IV.7.a above shall include:
 - 1) Identification of the specific equipment to be shut down, its location and permit number (if permitted), together with an identification of the source(s) affected;
 - 2) The reasons for the shutdown;
 - 3) The expected length of time that the equipment will be out of service;
 - 4) Identification of the nature and quantity of emissions likely to occur during the shutdown;
 - 5) Measures, including extra labor and equipment, which will be taken to minimize the length of the shutdown, the amount of air contaminants emitted, or the ambient effects of the emissions;
 - 6) Measures which will be taken to shut down or curtail the affected source(s) or the reasons why it is impossible or impracticable to shut down or curtail the affected source(s) during the shutdown; and
 - 7) Such other information as may be required by the Department.
- d. Written notice required under condition IV.7.a above may be emailed to the Department at aqreports@alleghenycounty.us in lieu of mailing a hard copy.

8. Breakdowns (§2108.01.c)

- a. In the event that any air pollution control equipment, process equipment, or other source of air contaminants breaks down in such manner as to have a substantial likelihood of causing the emission of air contaminants in violation of this permit, or of causing the emission into the open air of potentially toxic or hazardous materials, the person responsible for such equipment or source shall immediately, but in no event later than sixty (60) minutes after the commencement of the breakdown, notify the Department of such breakdown and shall, as expeditiously as possible but in no event later than seven (7) days after the original notification, provide written notice to the Department.
- b. To the maximum extent possible, all oral and written notices required shall include all pertinent facts, including:
 - 1) Identification of the specific equipment which has broken down, its location and permit number (if permitted), together with an identification of all related devices, equipment, and other sources which will be affected.
 - 2) The nature and probable cause of the breakdown.
 - 3) The expected length of time that the equipment will be inoperable or that the emissions will continue.
 - 4) Identification of the specific material(s) which are being, or are likely to be emitted, together with a statement concerning its toxic qualities, including its qualities as an irritant, and its potential for causing illness, disability, or mortality.
 - 5) The estimated quantity of each material being or likely to be emitted.
 - 6) Measures, including extra labor and equipment, taken or to be taken to minimize the length of

the breakdown, the amount of air contaminants emitted, or the ambient effects of the emissions, together with an implementation schedule.

- 7) Measures being taken to shut down or curtail the affected source(s) or the reasons why it is impossible or impractical to shut down the source(s), or any part thereof, during the breakdown.
- c. Notices required shall be updated, in writing, as needed to advise the Department of changes in the information contained therein. In addition, any changes concerning potentially toxic or hazardous emissions shall be reported immediately. All additional information requested by the Department shall be submitted as expeditiously as practicable.
- d. Unless otherwise directed by the Department, the Department shall be notified whenever the condition causing the breakdown is corrected or the equipment or other source is placed back in operation by no later than 9:00 AM on the next County business day. Within seven (7) days thereafter, written notice shall be submitted pursuant to Paragraphs a and b above.
- e. Breakdown reporting shall not apply to breakdowns of air pollution control equipment which occur during the initial startup of said equipment, provided that emissions resulting from the breakdown are of the same nature and quantity as the emissions occurring prior to startup of the air pollution control equipment.
- f. In no case shall the reporting of a breakdown prevent prosecution for any violation of this permit or Article XXI.
- g. Written notice required under condition IV.8.a above may be emailed to the Department at aqreports@alleghenycounty.us in lieu of mailing a hard copy.

9. Cold Start (§2108.01.d)

In the event of a cold start on any fuel-burning or combustion equipment, except stationary internal combustion engines and combustion turbines used by utilities to meet peak load demands, the person responsible for such equipment shall report in writing to the Department the intent to perform such cold start at least 24 hours prior to the planned cold start. Such report shall identify the equipment and fuel(s) involved and shall include the expected time and duration of the startup. Upon written application from the person responsible for fuel-burning or combustion equipment which is routinely used to meet peak load demands and which is shown by experience not to be excessively emissive during a cold start, the Department may waive these requirements and may instead require periodic reports listing all cold starts which occurred during the report period. The Department shall make such waiver in writing, specifying such terms and conditions as are appropriate to achieve the purposes of Article XXI. Such waiver may be terminated by the Department at any time by written notice to the applicant. Cold start notifications may be emailed to the Department at aqreports@alleghenycounty.us.

10. Monitoring of Malodorous Matter Beyond Facility Boundaries (§2104.04)

The permittee shall take all reasonable action as may be necessary to prevent malodorous matter from becoming perceptible beyond facility boundaries. Further, the permittee shall perform such observations as may be deemed necessary along facility boundaries to ensure that malodorous matter beyond the facility boundary in accordance with Article XXI §2107.13 is not perceptible and record all findings and corrective action measures taken.

11. Orders (§2108.01.f)

In addition to meeting the requirements of General Condition III.28 and Site Level Conditions IV.7 through IV.10 above, inclusive, the person responsible for any source shall, upon order by the Department, report to the Department such information as the Department may require in order to assess the actual and potential contribution of the source to air quality. The order shall specify a reasonable time in which to make such a report.

12. Violations (§2108.01.g)

The failure to submit any report or update thereof required by General Condition III.28 and Site Level Conditions IV.7 through IV.11 above, inclusive, within the time specified, the knowing submission of false information, or the willful failure to submit a complete report shall be a violation of this permit giving rise to the remedies provided by Article XXI §2109.02.

13. Emissions Testing (§2108.02)

- a. Orders: The person responsible for any source shall, upon order by the Department, conduct, or cause to be conducted, such emissions tests as specified by the Department within such reasonable time as is specified by the Department. Test results shall be submitted in writing to the Department within 20 days after completion of the tests, unless a different period is specified in the Department's order. Emissions testing shall comply with all applicable requirements of Article XXI §2108.02.e.
- b. Tests by the Department: Notwithstanding any tests conducted pursuant to this permit, the Department or another entity designated by the Department may conduct emissions testing on any source or air pollution control equipment. At the request of the Department, the permittee shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance of such tests.
- c. Testing Requirements: No later than 45 days prior to conducting any tests required by this permit, the person responsible for the affected source shall submit for the Department's approval a written test protocol explaining the intended testing plan, including any deviations from standard testing procedures, the proposed operating conditions of the source during the test, calibration data for specific test equipment and a demonstration that the tests will be conducted under the direct supervision of persons qualified by training and experience satisfactory to the Department to conduct such tests. In addition, at least 30 days prior to conducting such tests, the person responsible shall notify the Department in writing of the time(s) and date(s) on which the tests will be conducted and shall allow Department personnel to observe such tests, record data, provide pre-weighed filters, analyze samples in a County laboratory and to take samples for independent analysis. Test results shall be comprehensively and accurately reported in the units of measurement specified by the applicable emission limitations of this permit.
- d. Test methods and procedures shall conform to the applicable reference method set forth in this permit or Article XXI Part G, or where those methods are not applicable, to an alternative sampling and testing procedure approved by the Department consistent with Article XXI §2108.02.e.2.
- e. Violations: The failure to perform tests as required by this permit or an order of the Department, the failure to submit test results within the time specified, the knowing submission of false information, the willful failure to submit complete results, or the refusal to allow the Department,

upon presentation of a search warrant, to conduct tests, shall be a violation of this permit giving rise to the remedies provided by Article XXI §2109.02.

14. Abrasive Blasting (§2105.51)

- a. Except where such blasting is a part of a process requiring an operating permit, no person shall conduct or allow to be conducted, abrasive blasting or power tool cleaning of any surface, structure, or part thereof, which has a total area greater than 1,000 square feet unless such abrasive blasting complies with all applicable requirements of Article XXI §2105.51.
- b. In addition to complying with all applicable provisions of §2105.51, no person shall conduct, or allow to be conducted, abrasive blasting of any surface unless such abrasive blasting also complies with all other applicable requirements of Article XXI unless such requirements are specifically addressed by §2105.51.

15. Asbestos Abatement (§2105.62, §2105.63)

In the event of removal, encasement, or encapsulation of Asbestos-Containing Material (ACM) at a facility or in the event of the demolition of any facility, the permittee shall comply with all applicable provisions of Article XXI §2105.62 and §2105.63.

16. Protection of Stratospheric Ozone (40 CFR Part 82)

- a. Permittee shall comply with the standards for labeling of products using ozone-depleting substances pursuant to 40 CFR Part 82, Subpart E:
 - 1) All containers in which a Class I or Class II substance is stored or transported, all products containing a Class I substance, and all products directly manufactured with a process that uses a Class I substance must bear the required warning statement if it is being introduced into interstate commerce pursuant to §82.106;
 - 2) The placement of the required warning statement must comply with the requirements pursuant to §82.108;
 - 3) The form of the label bearing the required warning statement must comply with the requirements pursuant to §82.110; and
 - 4) No person may modify, remove or interfere with the required warning statement except as described in §82.112.
- b. Permittee shall comply with the standards for recycling and emissions reduction pursuant to 40 CFR Part 82, Subpart F:
 - 1) Persons opening appliances for maintenance, service, repair or disposal must comply with the prohibitions and required practices pursuant to §82.154 and §82.156;
 - 2) Equipment used during the maintenance, service, repair or disposal of appliances must comply with the standards for recycling and recovery equipment pursuant to §82.158;
 - 3) Persons maintaining, servicing, repairing or disposing of appliances, must be certified by an approved technician certification program pursuant to §82.161;
 - 4) Persons disposing of small appliances, motor vehicle air conditioners (MVAC) and MVAC-like appliances, must comply with the record keeping requirements pursuant to §82.166;
 - 5) Owners of commercial or industrial process refrigeration equipment must comply with the leak repair requirements pursuant to §82.156; and

- 6) Owners or operators of appliances normally containing 50 or more pounds of refrigerant must keep records of refrigerant purchased and added to such appliances pursuant to §82.166.
- c. If the permittee manufactures, transforms, destroys, imports or exports a Class I or Class II substance, the Permittee is subject to all the requirements as specified in 40 CFR Part 82, Subpart A (Production and Consumption Controls).
- d. If the permittee performs a service on a motor vehicle that involves an ozone-depleting substance, refrigerant or regulated substitute substance in the MVAC, the Permittee is subject to all the applicable requirements as specified in 40 CFR Part 82, Subpart B (Servicing of Motor Vehicle Air Conditioners).
- e. The permittee may switch from any ozone-depleting substance to any alternative that is listed as acceptable in the Significant New Alternatives Policy (SNAP) program promulgated pursuant to 40 CFR Part 82, Subpart G.

17. Volatile Organic Compound Storage Tanks (§2105.12.a)

No person shall place or store, or allow to be placed or stored, a volatile organic compound having a vapor pressure of 1.5 psia or greater under actual storage conditions in any aboveground stationary storage tank having a capacity equal to or greater than 2,000 gallons but less than or equal to 40,000 gallons, unless there is in operation on such tank pressure relief valves which are set to release at the higher of 0.7 psig of pressure or 0.3 psig of vacuum or at the highest possible pressure and vacuum in accordance with State or local fire codes, National Fire Prevention Association guidelines, or other national consensus standard approved in writing by the Department. Petroleum liquid storage vessels that are used to store produced crude oil and condensate prior to lease custody transfer are exempt from these requirements.

18. Fugitive Emissions (§2105.49)

The person responsible for a source of fugitive emissions, in addition to complying with all other applicable provisions of this permit shall take all reasonable actions to prevent fugitive air contaminants from becoming airborne. Such actions may include, but are not limited to:

- a. The use of asphalt, oil, water, or suitable chemicals for dust control;
- b. The paving and maintenance of roadways, parking lots and the like;
- c. The prompt removal of earth or other material which has been deposited by leaks from transport, erosion or other means;
- d. The adoption of work or other practices to minimize emissions;
- e. Enclosure of the source; and
- f. The proper hooding, venting, and collection of fugitive emissions.

19. Episode Plans (§2106.02)

The permittee shall upon written request of the Department, submit a source curtailment plan, consistent with good industrial practice and safe operating procedures, designed to reduce emissions of air contaminants during air pollution episodes. Such plans shall meet the requirements of Article XXI §2106.02.

20. New Source Performance Standards (§2105.05)

- a. It shall be a violation of this permit giving rise to the remedies provided by §2109.02 of Article

XXI for any person to operate, or allow to be operated, any source in a manner that does not comply with all requirements of any applicable NSPS now or hereafter established by the EPA, except if such person has obtained from EPA a waiver pursuant to Section 111 or Section 129 of the Clean Air Act or is otherwise lawfully temporarily relieved of the duty to comply with such requirements.

- b. Any person who operates, or allows to be operated, any source subject to any NSPS shall conduct, or cause to be conducted, such tests, measurements, monitoring and the like as is required by such standard. All notices, reports, test results and the like as are required by such standard shall be submitted to the Department in the manner and time specified by such standard. All information, data and the like which is required to be maintained by such standard shall be made available to the Department upon request for inspection and copying.

21. National Emission Standards for Hazardous Air Pollutants (§2104.08)

The permittee must be in compliance with the regulatory requirements delineated in 40 CFR Part 63 Subpart BBBBBB, "National Emission Standards for Hazardous Air Pollutants for Source Category: Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities" by no later than January 10, 2011.

DRAFT

V. EMISSION UNIT LEVEL TERMS AND CONDITIONS**A. Process P001: Gasoline and Ethanol Tank Truck Loading**

Process Description:	Gasoline and ethanol tank truck loading
Facility ID:	Loading rack with four bays: #1, #2, #3 and #4
Max. Design Rate:	1,250,000 gallons/day
Raw Materials:	Gasoline and ethanol
Control Device:	Activated carbon adsorption/gasoline absorption VCU

As identified above, Process P001 consists of the following number and type of equipment: One loading rack with four bays and eleven loading arms attached to an activated carbon adsorption/gasoline absorption VCU.

1. Restrictions:

- a. The permittee shall not operate or, allow to be operated the facility tank truck loading racks while loading gasoline unless the loading racks, vapor collection system and VRU are properly operated and maintained according to the following specifications, at all times: (40 CFR Part 60, Subpart XX)
 - 1) The vapor collection and recovery system shall be designed to collect the total organic compound vapors displaced from tank trucks during product loading. (§60.502(a), §63.11088(a), Table 2-1.a from Subpart BBBB of Part 63)
 - 2) The emissions to the atmosphere from the vapor collection and recovery system due to the loading of liquid product into gasoline tank trucks shall not exceed 35 milligrams of total organic compounds per liter of gasoline loaded. (§60.502(b)), Permit 0007-I001, condition no. 28, §63.11088(a), Table 2-1.a from Subpart BBBB of Part 63)
 - 3) The vapor collection system shall be designed to prevent any organic compound vapors collected at one loading rack from passing to another loading rack. (§60.502(d), §63.11088(a), Table 2-1.c from Subpart BBBB of Part 63)
 - 4) The permittee shall act to assure that loadings of gasoline tank trucks at the facility are made only into tanks equipped with vapor collection equipment that is compatible with the terminal's vapor collection system. (§60.502(f), §63.11088(a), Table 2-1.d from Subpart BBBB of Part 63)
 - 5) The permittee shall act to assure that the terminal's and the tank truck's vapor collection systems are connected during each loading of a gasoline tank truck at the facility. (§60.502(g), §63.11088(a), Table 2-1.d from Subpart BBBB of Part 63)
 - 6) The vapor collection and liquid loading equipment shall be designed and operated to prevent gauge pressure in the delivery tank from exceeding 4,500 pascals (450 mm of water) during product loading. This level is not to be exceeded when measured by the procedures specified in condition V.A.2.e. (§60.502(h), §63.11088(a), Table 2-1.d from Subpart BBBB of Part 63)
 - 7) No pressure-vacuum vent in the bulk gasoline terminal's vapor collection system shall begin to open at a system pressure less than 4,500 pascals (450 mm of water). (§60.502(i), §63.11088(a),

Table 2-1.d from Subpart BBBBBB of Part 63)

- b. The permittee shall not handle, or allow to be handled, gasoline in the subject bulk gasoline terminal, in such manner that it is spilled, discarded in sewers, stored in open containers, or otherwise handled so as to result in uncontrolled evaporation into the open air. (§2105.13.a)
- c. The permittee shall not transfer, or allow the transfer of, gasoline between any tank truck or trailer and any stationary storage tank located in a bulk gasoline terminal, or any small gasoline storage tank to which Article XXI, §2105.13.e applies, unless: (§2105.13.b, Permit 0007-I001 condition no. 34)
- 1) A vapor balance system is in good working order and is designed and operated during the transfer in such manner that: (§2105.13.b.1)
 - a) Gauge pressure does not exceed 18 inches of water and vacuum does not exceed 6 inches of water in the gasoline tank truck; (§2105.13.b.1.A, Permit 0007-I001, condition no. 34.A)
 - b) Readings do not equal or exceed 100 percent of the lower explosive limit (LEL, measured as propane) at one inch from all points on the perimeter of a potential leak source when measured by the method referenced in Article XXI §2107.04 during transfer operations; and (§2105.13.b.1.B, Permit 0007-I001, condition no. 34.B)
 - c) There are no avoidable visible liquid leaks during transfer operations; (§2105.13.b.1.C, Permit 0007-I001, condition no. 34.C)
 - 2) Any truck, vapor balance system, or vapor disposal system, where applicable, that exceeds the limits in Condition V.A.1.c.1) above is repaired and retested according to the method referenced in Article XXI §2107.04 within 15 days; (§2105.13.b.2)
 - 3) There are no visually or audibly detectable leaks in the pressure/vacuum relief valves and hatch covers of the tank truck or the pressure/relief valves and hatch covers of the trailer, the truck tanks or storage tanks, or associated vapor and liquid lines during transfer; and (§2105.13.b.3)
 - 4) The pressure and vacuum relief valves on stationary and vehicular tanks are set to release at no less than 0.7 psig of pressure or 0.3 psig of vacuum or the highest allowable pressure and vacuum as specified in state or local fire codes, or the National Fire Prevention Association guidelines or other national consensus standard approved in writing by the Department. (§2105.13.b.4)
- d. The permittee shall not load, or allow to be loaded, gasoline from the bulk gasoline terminal into a vehicular tank unless: (§2105.13.c)
- 1) There is in operation on the gasoline loading racks a vapor collection and disposal system reducing uncontrolled emissions by at least 90% by weight or emitting no more than 0.0668 pounds of gasoline for every 100 gallons of gasoline loaded; (§2105.13.c.1)
 - 2) There is in operation on the gasoline loading racks a loading arm with a vapor collection adaptor and pneumatic, hydraulic or other mechanical means to force a vapor-tight seal between the adaptor and the hatch of the vehicular tank. A means shall also be provided to prevent gasoline drainage from the loading device when it is not connected to the hatch, and to accomplish complete drainage before disconnection. When loading is done by means other than hatches, all loading, and vapor lines shall be equipped with fittings which make vapor-tight connections, and which are closed when disconnected. (§2105.13.c.2)
 - 3) The permittee shall maintain records of daily throughput. Such records shall be retained for not less than five years and shall be made available for inspection and copying by the

Department upon request. (§2105.13.c.2)

- e. The permittee shall not transfer, or allow the transfer of, gasoline into or from a gasoline tank truck unless such tank truck: (§2105.13.f, Permit 0007-I001 condition no. 35)
 - 1) Has been tested within the prior 12-month period in accordance with the procedure referenced in Article XXI §2107.04;
 - 2) Sustains a pressure change no more than 3 inches of water in five minutes when pressurized to a gauge pressure of 18 inches of water or evacuated to a gauge pressure of six inches of water during such testing;
 - 3) Is repaired and retested within 15 days of a test which does not meet the requirements of Condition V.A.1.e.2) above; and
 - 4) Displays a clear marking near the federal Department of Transportation certification plate which shows the most recent date upon which the gasoline tank truck passed the test required by this condition.
- f. The combined maximum facility throughput limitation for gasoline and ethanol shall not exceed 456,000,000 gallons during any twelve (12) month consecutive period. (Permit 0007-I001 condition no. 29)
- g. The permittee shall operate and maintain the truck loading rack and vapor recovery and disposal system in accordance with good engineering practice and manufacturer’s specifications. (§2105.05, Permit 0007-I001 condition no. 33)
- h. The permittee shall not operate, or allow to be operated, the loading racks or VRU in gasoline service unless the following indicators are within the specified parameters. (§2103.12.a.2.B)
 - 1) Carbon bed vacuum operating range shall between 25" Hg and 28.5" Hg, measured to within 0.5" Hg of actual pressure and recorded to the nearest 0.5" Hg;
 - 2) Maximum carbon bed temperature shall not exceed 150 0F, measured to within 50F of actual temperature and recorded to the nearest 50F; and
 - 3) Absorber column pressure operating range shall be between 9 lbs pressure and 14 lbs pressure, measured to within 0.5 lbs of actual and recorded to the nearest 0.5 lbs.
- i. Emissions from the VRU shall not exceed the following limitations at any time. (§60.502(b), §2103.12.a.2.B, Permit No. 0007-I001 condition no. 28)

TABLE V-A-1: VRU Emission Limitations

Pollutant	mg/l	lbs/hr	tpy*
Volatile Organic Compounds	35	52.58	66.6
Hazardous Air Pollutants	NA	3.01	3.81

*A year is defined as any consecutive 12-month period.

2. Testing Requirements:

- a. The permittee shall conduct emission tests on the gasoline truck loading racks and VRU by April 2004 and once every five consecutive years thereafter, to demonstrate compliance with Conditions V.A.1.a.2) and V.A.1.a.6) above.. The permittee shall conduct such testing in accordance with the

requirements of Article XXI §2108.02 and §2107.04. (§2103.12.a.2.B, §2105.13.c, Permit 0007-1001 condition no. 31)

- b. In conducting the required performance tests, the permittee shall use as reference methods and procedures the test methods in Appendix A of 40 CFR Part 60 or other methods and procedures as specified in applicable sections of 40 CFR 60, Subpart XX and this permit. The three-run requirement of 40 CFR 60.8.f does not apply. (§60.503(a), §63.11092(a)(1)(i))
- c. Immediately before the performance test specified in Condition V.A.2.a above, the permittee shall use U.S. EPA Method 21 to monitor for leakage of vapor, all potential sources in the terminal's vapor collection system equipment while a gasoline tank truck is being loaded. The permittee shall repair all leaks with readings of 500 ppm (as methane) or greater before conducting the performance test. (§60.503(b), §63.11092(a)(1)(i))
- d. The permittee shall determine compliance with the standard in Condition V.A.1.a.2) above, as follows: (§60.503(c))
 - 1) The performance test shall be 6 hours long during which at least 300,000 liters of gasoline is loaded. If this is not possible, the test may be continued the same day until 300,000 liters of gasoline is loaded, or the test may be resumed the next day with another complete 6-hour period. In the latter case, the 300,000-liter criterion need not be met. However, as much as possible, testing should be conducted during the 6-hour period in which the highest throughput normally occurs. (§60.503(c)(1))
 - 2) The emission rate (E) of total organic compounds shall be computed using the following equation: (§60.503.c.3)

$$E = \sum_{i=1}^n (V_{esi} C_{ei}) / (L 10^6)$$

where:

E = emission rate of total organic compounds, mg/liter of gasoline loaded.

V_{esi} = volume of air-vapor mixture exhausted at each interval I, scm.

C_{ei} = concentration of total organic compounds at each interval I, ppm.

L = total volume of gasoline loaded, liters.

n = number of testing intervals.

i = emission testing interval of 5 minutes.

K = density of calibration gas, 1.83 x 10⁶ for propane and 2.41 x 10⁶ for butane, mg/scm.

- 3) The performance test shall be conducted in intervals of 5 minutes. For each interval i, readings from each measurement shall be recorded, and the volume exhausted (V_{esi}) and the corresponding average total organic compounds concentration (C_{ei}) shall be determined. The sampling system response time shall be considered in determining the average total organic compounds concentration corresponding to the volume exhausted. (§60.503(c)(4))
- 4) Method 2A shall be used to determine the volume (V_{esi}) air-vapor mixture exhausted at each interval. (§60.503(c)(5)(ii))
- 5) Method 25A or 25B shall be used for determining the total organic compounds concentration (C_{ei}) at each interval. The calibration gas shall be either propane or butane. The permittee may exclude the methane and ethane content in the exhaust vent by any method (e.g., Method 18) approved by the U.S. EPA and the Department. (§60.503(c)(6))
- 6) To determine the volume (L) of gasoline dispensed during the performance test period at all

loading racks whose vapor emissions are controlled by the processing system being tested, terminal records or readings from gasoline dispensing meters at each loading rack shall be used. (§60.503(c)(7))

- e. The permittee shall determine compliance with the standard in Condition V.A.1.a.6) above, as follows: (§60.503(d))
- 1) A pressure measurement device (liquid manometer, magnehelic gauge, or equivalent instrument), capable of measuring up to 500 mm of water gauge pressure with plus/minus 2.5 mm of water precision, shall be calibrated and installed on the terminal's vapor collection system at a pressure tap located as close as possible to the connection with the gasoline tank truck.
 - 2) During the performance test, the pressure shall be recorded every 5 minutes while a gasoline truck is being loaded; the highest instantaneous pressure that occurs during each loading shall also be recorded. Every loading position shall be tested at least once during the performance test.
- f. If the permittee is operating the gasoline loading rack in compliance with an enforceable State, local, or tribal rule or permit that requires the loading rack to meet an emission limit of 80 milligrams (mg), or less, per liter of gasoline loaded (mg/l), the permittee may submit a statement by a responsible official of their facility certifying the compliance status of the loading rack in lieu of the test required under Conditions V.A.2.b and V.A.2.c above (§63.11092(a)(2))
- g. If the permittee has conducted performance testing on the vapor processing and collection systems within 5 years prior to January 10, 2008, and the test is for the affected facility and is representative of current or anticipated operating processes and conditions, the permittee may submit the results of such testing in lieu of the test required under Condition V.A.2.f above provided the testing was conducted using the test methods and procedures in §60.503. Should the Department deem the prior test data unacceptable, the facility is still required to meet the requirement to conduct an initial performance test within 180 days of the compliance date specified in §63.11083; thus, previous test reports should be submitted as soon as possible after January 10, 2008. (§63.11092(a)(3))
- h. The permittee shall install, calibrate, certify, operate, and maintain, according to the manufacturer's specifications, a continuous monitoring system (CMS) while gasoline vapors are displaced to the vapor processor systems. For each facility conducting a performance test under Condition V.A.2.b above and for each facility utilizing the provisions of Conditions V.A.2.f and V.A.2.g above, the CMS shall be installed by January 10, 2011. (§63.11092(b))
- i. For each performance test conducted under Condition V.A.2.b above, the permittee shall determine a monitored operating parameter value for the carbon adsorption system. During the performance test, a continuous emissions monitoring system (CEMS) capable of measuring organic compound concentration shall be installed in the exhaust air stream. (§63.11092(b)(1))
- j. Conduct of performance tests. Performance tests shall be conducted under such conditions as the Department specifies to the owner or operator, based on representative performance (i.e., performance based on normal operating conditions) of the affected source. Upon request, the owner or operator shall make available to the Department such records as may be necessary to determine the conditions of performance tests. (§63.11092(g))

3. Monitoring Requirements:

- a. The permittee shall not operate or, allow to be operated the facility tank truck loading racks while loading gasoline unless loadings of liquid product into gasoline tank trucks are limited to vapor-tight gasoline tank trucks using the following procedures: (§60.502(e))
 - 1) The permittee shall obtain the vapor tightness documentation described in Condition V.A.4.i below for each gasoline tank truck which is to be loaded at the facility. (§60.502(e)(1))
 - 2) The tank identification number shall be recorded as each gasoline tank truck is loaded. (§60.502(e)(2))
 - 3) The permittee shall cross-check each tank identification number obtained in Condition V.A.3.a.2) above with the file of tank vapor tightness documentation within 2 weeks after the corresponding tank is loaded, unless either of the following conditions is maintained: (§60.502(e)(3)(i))
 - a) If less than an average of one gasoline tank truck per month over the last 26 weeks is loaded without vapor tightness documentation, then the documentation cross-check shall be performed each quarter; or
 - b) If less than an average of one gasoline tank truck per month over the last 52 weeks is loaded without vapor tightness documentation, then the documentation cross check shall be performed semiannually.
 - 4) If either the quarterly or semiannual cross-check reveals that these conditions were not maintained, the source shall return to biweekly monitoring until such time as these conditions are again met. (§60.502(e)(3)(ii))
 - 5) The permittee shall notify the owner or operator of each non-vapor-tight gasoline tank truck loaded at the facility within 1 week of the documentation cross-check. (§60.502(e)(4))
 - 6) The permittee shall take steps assuring that the non-vapor-tight gasoline tank truck will not be reloaded at the facility until vapor tightness documentation for that tank is obtained. (§60.502(e)(5))
- b. The permittee shall monitor and record the indicators specified in condition V.A.1.h.1) through V.A.1.h.3) above, during gasoline service, once per cycle per week. One cycle shall be defined as being the complete adsorption and regeneration of both carbon units, in succession. (§2103.12.a.2.B)
- c. The carbon in each bed shall be sampled and tested for sufficient activity once every two consecutive years. Such tests shall be in accordance with manufacturers' or carbon suppliers' recommendations as approved by the Department. (§2103.12.a.2.B)
- d. The permittee shall perform a monthly leak inspection of all equipment in gasoline service, as defined in §63.11100. For this inspection, detection methods incorporating sight, sound, and smell are acceptable. ((§60.502(j), §63.11089.a)
- e. A logbook shall be used and shall be signed by the permittee at the completion of each inspection. A section of the logbook shall contain a list, summary description, or diagram(s) showing the location of all equipment in gasoline service at the facility. (§63.11089.b)
- f. Each detection of a liquid or vapor leak shall be recorded in the logbook. When a leak is detected, an initial attempt at repair shall be made as soon as practicable, but no later than 5 calendar days

after the leak is detected. Repair or replacement of leaking equipment shall be completed within 15 calendar days after detection of each leak, except as provided in Condition V.A.3.g below. (§63.11089.c)

- g. Delay of repair of leaking equipment will be allowed if the repair is not feasible within 15 days. The permittee shall provide in the semiannual report specified in Condition V.A.5.j below, the reason(s) why the repair was not feasible and the date each repair was completed. (§63.11089.d)

4. Record Keeping Requirements:

- a. The tank truck vapor tightness documentation required in Condition V.A.3.a.1) above, shall be kept on file at the terminal in a permanent form available for inspection. (§60.505(a))
- b. A record of each monthly leak inspection required in Condition V.A.3.d above, shall be kept on file at the terminal for at least 5 years. Inspection records shall include, as a minimum, the following information: (§60.505(c))
- 1) Date of inspection.
 - 2) Findings (may indicate no leaks discovered; or location, nature, and severity of each leak).
 - 3) Leak determination method.
 - 4) Corrective action (date each leak repaired; reasons for any repair interval in excess of 15 days).
 - 5) Inspector name and signature.
- c. The permittee shall keep documentation of all notifications required in Condition V.A.3.a.5) above, on file at the terminal for at least 5 years. (§60.505(d))
- d. The permittee shall keep records of all replacements or additions of components performed on an existing vapor processing system for at least 5 years. (§60.505(f))
- e. The permittee shall comply with the following record-keeping requirements: (§2105.13.g, Permit 0007-I001 condition no. 36)
- 1) Records of all tests and repairs shall be maintained in a legible, readily available condition for five (5) years after the date the testing or repair was completed. Such records shall include at a minimum:
 - a) The gasoline tank truck serial number and identification of the vapor collection system involved;
 - b) The date of testing;
 - c) If applicable, the type of repair and the dates of repair and retesting;
 - d) For each test or retest, the initial test pressure and the time of the reading, the final test pressure and the time of the reading, the initial test vacuum and the time of the reading, and the final test vacuum and the time of the reading;
 - e) At the top of each page, the company name, and the date and location of the tests on the page; and
 - f) The name and title of the person conducting the test.
 - 2) Copies of all records and reports shall be made available to the Department upon request for inspection and copying. A copy of the test results for each gasoline tank truck shall be kept with the truck.

- f. The permittee shall keep and maintain the following data for the loading racks and VRU: (§2103.12.h.1, §2105.13.c.3)
- 1) Throughput per product (daily, monthly totals, 12-month rolling totals);
 - 2) All monitoring data specified in Condition V.A.3.b above (weekly);
 - 3) Records of operation, maintenance, inspection, calibration and/or replacement of process or control equipment;
 - 4) Carbon bed sample test methods and reports; and
 - 5) Stack test protocols and reports.
- g. The permittee shall record all instances of non-compliance with the conditions of this permit and corrective action taken to restore compliance, upon occurrence. (§2103.12.a.2.B)
- h. *EPA Method 27, Appendix A–8, 40 CFR part 60.* Conduct the test in Condition V.A.4.i below using a time period (t) for the pressure and vacuum tests of 5 minutes. The initial pressure (Pi) for the pressure test shall be 460 millimeters (mm) of water (18 inches of water), gauge. The initial vacuum (Vi) for the vacuum test shall be 150 mm of water (6 inches of water), gauge. The maximum allowable pressure and vacuum changes (Δp , Δv) for all affected gasoline cargo tanks is 3 inches of water, or less, in 5 minutes. (§63.11092(f))
- i. The permittee shall keep records of the test results for each gasoline cargo tank loading at the facility as specified in Conditions V.A.4.i.1) and V.A.4.i.2) below. (§60.505(b), §63.11094(b))
- 1) Annual certification testing performed under Condition V.A.4.h above. (§63.11094(b)(1))
 - 2) The documentation file shall be kept up to date for each gasoline cargo tank loading at the facility. The documentation for each test shall include, at a minimum, the following information: (§63.11094(b)(2))
 - a) *Name of test:* Annual Certification Test—Method 27 Test Procedure;
 - b) Cargo tank owner's name and address;
 - c) Cargo tank identification number;
 - d) Test location and date;
 - e) Tester name and signature;
 - f) *Witnessing inspector, if any:* Name, signature, and affiliation;
 - g) *Vapor tightness repair:* Nature of repair work and when performed in relation to vapor tightness testing; and
 - h) *Test results:* Test pressure; pressure or vacuum change, mm of water; time period of test; number of leaks found with instrument; and leak definition.
- j. As an alternative to keeping records at the terminal of each gasoline cargo tank test result as required in Condition V.A.4.i above, the permittee shall comply with the requirements in either Condition V.A.4.j.1) or V.A.4.j.2) below. (§63.11094(c))
- 1) An electronic copy of each record is instantly available at the terminal. (§63.11094(c)(1))
 - a) The copy of each record is an exact duplicate image of the original paper record with certifying signatures.
 - b) The Department is notified in writing that each terminal using this alternative is in compliance.
 - 2) For facilities that use a terminal automation system to prevent gasoline cargo tanks that do not

have valid cargo tank vapor tightness documentation from loading (e.g., via a card lock-out system), a copy of the documentation is made available (e.g., via facsimile) for inspection by the Department's delegated representatives during the course of a site visit, or within a mutually agreeable time frame. (§63.11094(c)(2))

- a) The copy of each record is an exact duplicate image of the original paper record with certifying signatures.
 - b) The Department is notified in writing that each terminal using this alternative is in compliance.
- k. The permittee subject to the equipment leak provisions of Conditions V.A.3.d through V.A.3.g above shall prepare and maintain a record describing the types, identification numbers, and locations of all equipment in gasoline service. For facilities electing to implement an instrument program under §63.11089, the record shall contain a full description of the program. (§63.11094(d))
- l. The permittee subject to equipment leak inspections under Conditions V.A.3.d through V.A.3.g above shall record in the log book for each leak that is detected the information specified in Condition V.A.4.1.1) through V.A.4.1.7) below. (§63.11094(e))
- 1) The equipment types and identification number. (§63.11094(e)(1))
 - 2) The nature of the leak (i.e., vapor or liquid) and the method of detection (i.e., sight, sound, or smell). (§63.11094(e)(2))
 - 3) The date the leak was detected and the date of each attempt to repair the leak. (§63.11094(e)(3))
 - 4) Repair methods applied in each attempt to repair the leak. (§63.11094(e)(4))
 - 5) "Repair delayed" and the reason for the delay if the leak is not repaired within 15 calendar days after discovery of the leak. (§63.11094(e)(5))
 - 6) The expected date of successful repair of the leak if the leak is not repaired within 15 days. (§63.11094(e)(6))
 - 7) The date of successful repair of the leak. (§63.11094(e)(7))
- m. The permittee shall: (§63.11094(f))
- 1) Keep an up-to-date, readily accessible record of the continuous monitoring data required under Condition V.A.2.h or V.B.3 below. This record shall indicate the time intervals during which loadings of gasoline cargo tanks have occurred or, alternatively, shall record the operating parameter data only during such loadings. The date and time of day shall also be indicated at reasonable intervals on this record. (§63.11094(f)(1))
 - 2) Record and report simultaneously with the Notification of Compliance Status required under Condition V.A.5.f below. (§63.11094(f)(2))
 - a) All data and calculations, engineering assessments, and manufacturer's recommendations used in determining the operating parameter value under Condition V.A.2.h or V.B.3 below.
 - 3) If the permittee requests approval to use a vapor processing system or monitor an operating parameter other than those specified in Condition V.A.2.h, the permittee shall submit a description of planned reporting and recordkeeping procedures. (§63.11094(f)(3))
- n. The permittee shall keep records as specified below: (§63.11094(g))
- 1) Records of the occurrence and duration of each malfunction of operation (i.e., process equipment) or the air pollution control and monitoring equipment. (§63.11094(g)(1))

- 2) Records of actions taken during periods of malfunction to minimize emissions in accordance with Condition V.A.6 below, including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation. (§63.11094(g)(2))

5. Reporting Requirements:

- a. The permittee shall report the following information to the Department within thirty days of the end of each calendar quarter. The reports shall contain all required information for the time period of the report. (Permit 0007-I001 condition no. 37, §2103.12.k.1)
 - 1) Weekly, monthly and 12-month data required to be recorded by Condition V.A.4.f above;
 - 2) All carbon bed test reports and stack tests.
 - 3) Non-compliance information required to be recorded by V.A.4.g above.
- b. Monthly VOC and HAP emission estimates for the facility shall be submitted to the Department upon request. Emissions estimates shall be based on storage tank emissions using Tanks 4.0 or other EPA approved methodology, 35 mg/l VRU gasoline emissions, 9 mg/l truck loading gasoline emissions and HAP estimations based on speciation data supplied by the manufacturer. (Permit 0007-I001 condition no. 38, §2103.12.a.2.B)
- c. Reporting instances of non-compliance in accordance with Condition V.A.5.a above, does not relieve the permittee of the requirement to report breakdowns in accordance with Site Level Condition IV.8 above, if appropriate. (§2103.12.k.1)
- d. The permittee shall keep applicable records and submit reports as specified in V.A.4.n above and V.A.5.1 below. (§63.11085(b))
- e. The permittee shall comply with the Notification of Compliance Status required under Condition V.A.5.f below. (§63.11093(a); §63.9(b))
- f. The permittee shall submit a Notification of Compliance Status as specified in §63.9(h). The Notification of Compliance Status shall specify which of the compliance options included in Table 1 to this subpart is used to comply with this subpart. (§63.11093(b))
- g. The permittee shall submit a Notification of Performance Test, as specified in §63.9(e), prior to initiating testing required by Condition V.A.5.e or V.A.5.f above. (§63.11093(c))
- h. The permittee shall submit additional notifications specified in §63.9, as applicable. (§63.11093(d))
- i. The permittee shall include in a semiannual compliance report to the Department the following information, as applicable: (§63.11095(a))
 - 1) For storage vessels, if the permittee is complying with options 2(a), 2(b), or 2(c) in Table 1 to this subpart, the information specified in §60.115b(a), §60.115b(b), or §60.115b(c), depending upon the control equipment installed, or, if the permittee is complying with option 2(d) in Table 1 to this subpart, the information specified in §63.1066. (§63.11095(a)(1))
 - 2) For loading racks, each loading of a gasoline cargo tank for which vapor tightness documentation had not been previously obtained by the facility. (§63.11095(a)(2))
 - 3) For equipment leak inspections, the number of equipment leaks not repaired within 15 days

- after detection. (§63.11095(a)(3))
- 4) For storage vessels complying with Condition V.B.3 after January 10, 2011, the storage vessel's Notice of Compliance Status information can be included in the next semi-annual compliance report under §63.11093. (§63.11095(a)(4))
- j. The permittee shall submit an excess emissions report to the Department at the time the semiannual compliance report is submitted. Excess emissions events under this subpart, and the information to be included in the excess emissions report, are specified in Condition V.A.5.j.1) through V.A.5.j.3) below. (§63.11095(b))
- 1) Each instance of a non-vapor-tight gasoline cargo tank loading at the facility in which the owner or operator failed to take steps to assure that such cargo tank would not be reloaded at the facility before vapor tightness documentation for that cargo tank was obtained. (§63.11095(b)(1))
- 2) Each reloading of a non-vapor-tight gasoline cargo tank at the facility before vapor tightness documentation for that cargo tank is obtained by the facility in accordance with Condition V.A.4.i above. (§63.11095(b)(2))
- 3) For each occurrence of an equipment leak for which no repair attempt was made within 5 days or for which repair was not completed within 15 days after detection: (§63.11095(b)(5))
- a) The date on which the leak was detected;
- b) The date of each attempt to repair the leak;
- c) The reasons for the delay of repair; and
- d) The date of successful repair.
- k. The permittee shall submit a semiannual excess emissions report, including the information specified in Condition V.A.5.i.3) and V.A.5.j.3) above, only for a 6-month period during which an excess emission event has occurred. If no excess emission events have occurred during the previous 6-month period, no report is required. (§63.11095(c))
- l. The permittee shall submit a semiannual report including the number, duration, and a brief description of each type of malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report shall also include a description of actions taken by an owner or operator during a malfunction of an affected source to minimize emissions in accordance with Condition V.A.6 below, including actions taken to correct a malfunction. The report may be submitted as a part of the semiannual compliance report, if one is required. Owners or operators of affected bulk plants and pipeline pumping stations are not required to submit reports for periods during which no malfunctions occurred. (§63.11095(d))

6. Work Practice Standard:

The permittee shall, at all times, operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Department, which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source. (§63.11085(a))

7. Additional Requirements:

None except as provided elsewhere

B. Storage Tanks: T001 and T002

Process Description: Two Aboveground storage tanks not subject to 40 CFR Part 60 Subpart Kb
Facility ID: T001 and T002
Capacities: 3,439,800 gallons and 2,268,000 gallons
Raw Materials: Gasoline
Control Device: Internal floating roofs

As identified above, storage tanks T001 and T002 consists of the following number and type of equipment: Two vertical aboveground storage tanks with internal floating roofs in gasoline service

1. Restrictions:

- a. The permittee shall not place or store, or allow to be placed or stored, a volatile organic compound having a vapor pressure greater than 1.5 psia under actual storage conditions in any stationary tank, reservoir, or other container with a capacity greater than 40,000 gallons, unless such tank, reservoir, or other container is a pressure tank capable of maintaining working pressure sufficient to, at all times, prevent vapor or gas loss to the atmosphere or is equipped with: (§2105.12.b)
 - 1) An internal floating roof, except that this control equipment shall not be permitted if the volatile organic compounds have a vapor pressure of 11.0 psia or greater under actual storage conditions; or
 - 2) A vapor recovery and disposal system reducing uncontrolled emissions of volatile organic compounds by at least 90% by weight. Compliance testing shall be done in accordance with the provisions of §2107.04 of Article XXI.
- b. Tanks T001 and T002 floating roofs shall comply with the following requirements for internal fixed roofs: (§2105.12.c.2)
 - 1) The internal floating roofs shall be fitted with a primary seal and shall comply with all of the following equipment requirements:
 - a) A closure seal, or seals, to close the space between the roof edge and tank wall shall be used.
 - b) There shall be no holes, tears, or other openings in the seal or any seal fabric or materials.
 - c) All openings except stub drains shall be equipped with covers, lids, or seals such that:
 - i) The cover, lid, or seal is in the closed position at all times except when in actual use;
 - ii) Automatic bleeder vents are closed at all times except when the roof is floated off or landed on the roof leg supports; and,
 - iii) Rim vents, if provided, are set to open when the roof is being floated off the roof leg supports or at the manufacturer's recommended setting.
- c. The combined emissions from tanks T001 and T002 shall not exceed the following at any time: (§2102.04.b.5)

TABLE V-B-1 Emission Limitations for T001 and T0021

Pollutant	tons/yr ¹
Volatile Organic Compounds	9.65
Hazardous Air Pollutants	1.87

¹A year is defined as any consecutive 12-month period.

2. Testing Requirements:

The Department reserves the right to require emissions testing sufficient to assure compliance with the terms and conditions of this permit. Such testing shall be performed in accordance with Site Level Condition IV.13 above entitled “Emissions Testing.” (§2103.12.h.1)

3. Monitoring Requirements:

The permittee shall perform routine inspections on the internal floating roofs in T001 and T002, annually in order to ensure compliance with Condition V.B.1.b above. (§2105.12.f, §63.11092(e)(1))

4. Record Keeping Requirements:

- a. The permittee shall keep and maintain the following data for each subject tank: (§2105.12.f.3, §2103.12.h.1, §2103.12.a.2.B)
 - 1) Type, amount and period of storage of each volatile organic liquid stored (monthly and 12-month);
 - 2) Maximum true vapor pressure of each liquid as stored (monthly);
 - 3) Readily accessible records, showing the dimension of each subject storage vessel and an analysis showing the capacity of each storage vessel. These records shall be kept for the life of the subject tanks; and
 - 4) Results of all inspections performed on the subject tanks.
- b. For volatile organic compounds whose storage temperature is governed by ambient weather conditions, the vapor pressure under actual storage conditions shall be determined using a temperature which is representative of the average storage temperature for the hottest month of the year in which such storage takes place. (§2105.12.d)
- c. The permittee shall keep records and submit reports as specified in Conditions V.A.4.i through V.A.4.n above and Conditions V.A.5.i through V.A.5.l above and V.B.4.f below. (§63.11087(e))
- d. The permittee shall record all instances of non-compliance with the conditions of this permit and corrective action taken to restore compliance, upon occurrence. (§2103.12.h.1)
- e. All records shall be retained by the facility for at least five (5) years. These records shall be made available to the Department upon request for inspection and/or copying. (§2103.12.j.2)
- f. The permittee shall keep records as specified in §60.115b, if the permittee is complying with options 2(a), 2(b), or 2(c) in Table 1 to this subpart, except records shall be kept for at least 5 years. If the permittee is complying with the requirements of option 2(d) in Table 1 to this subpart, the permittee shall keep records as specified in §63.1065. (§63.11094(a))

5. Reporting Requirements:

- a. The permittee shall report the following information to the Department within thirty days of the end of each calendar quarter. The reports shall contain all required information for the time period of the report: (Permit 0007-I001 condition no. 37, §2103.12.h.1)
 - 1) Data required to be recorded by Conditions V.B.4.a.1) and V.B.4.a.2) above ; and
 - 2) Non-compliance information required to be recorded by Condition V.B.4.d above.
- b. The permittee shall submit the applicable notifications as required under V.A.5.e through V.A.5.h above. (§63.11087(d))
- c. Reporting instances of non-compliance in accordance with Condition V.B.5.a.2) above does not relieve the permittee of the requirement to report breakdowns in accordance with Site Level Condition IV.8 above, if appropriate. (§2103.12.k.1)
- d. Monthly VOC and HAP emission estimates for the facility shall be submitted to the Department upon request. Emissions estimates shall be based on storage tank emissions using Tanks 4.0 or other EPA approved methodology, 35 mg/l VRU gasoline emissions, 9 mg/l truck loading gasoline emissions and HAP estimations based on speciation data supplied by the manufacturer. (Permit 0007-I001 condition no. 38)

6. Work Practice Standard:

- a. The permittee shall meet the following emission limit and management practices: (§63.11087.a, Table 1(2b) & 2(d) to Subpart BBBB of Part 63)
 - 1) Equip each internal floating roof gasoline storage tank according to the requirements in §60.112b(a)(1), except for the secondary seal requirements under §60.112b(a)(1)(ii)(B) and the requirements in §60.112b(a)(1)(iv) through (ix); and
 - 2) Equip and operate each internal floating roof gasoline storage tank according to the applicable requirements in §63.1063(a)(1) and (b).
- b. The permittee shall comply with the applicable monitoring requirements specified in Condition V.B.3 above (§63.11087.c).
- c. If the permittee's gasoline storage tank is subject to, and complies with, the control requirements of 40 CFR part 60, subpart Kb, the permittee's storage tank will be deemed in compliance with Conditions V.B.4.c, V.B.5.b, V.B.6.a, V.B.6.b above. The permittee shall report this determination in the Notification of Compliance Status report under V.A.5.f above. (§63.11087(f)).

C. Storage Tanks: T003, T004 and T321

Process Description: Three Aboveground storage tanks subject to 40 CFR Part 60 Subpart Kb
Facility ID: T003, T004 and T321
Capacity: 2,809,900 gallons, 168,000 gallons and 126,830 gallons, respectively
Raw Materials: Gasoline (T003) and Aviation Gasoline (T004 and T321)
Control Device: Internal floating roofs

As identified above, storage tanks T003, T004 and T321 consists of the following number and type of equipment: Three vertical aboveground storage tanks with internal floating roofs in gasoline and ethanol service

1. Restrictions:

- a. The permittee shall not place or store, or allow to be placed or stored, a volatile organic compound having a vapor pressure greater than 1.5 psia under actual storage conditions in any stationary tank, reservoir, or other container with a capacity greater than 40,000 gallons, unless such tank, reservoir, or other container is a pressure tank capable of maintaining working pressure sufficient to, at all times, prevent vapor or gas loss to the atmosphere or is equipped with: (§2105.12.b, Installation Permit No. 0007-I002a Condition V.A.1.a)
 - 1) An internal floating roof, except that this control equipment shall not be permitted if the volatile organic compounds have a vapor pressure of 11.0 psia or greater under actual storage conditions; or
 - 2) A vapor recovery and disposal system reducing uncontrolled emissions of volatile organic compounds by at least 90% by weight. Compliance testing shall be done in accordance with the provisions of §2107.04 of Article XXI.
- b. Tanks T003, T004 and T321 shall comply with the following requirements for internal fixed roofs: (§2105.12.c.2, Installation Permit No. 0007-I002a Condition V.A.1.b)
 - 1) The Internal floating roofs shall be fitted with a primary seal and shall comply with all of the following equipment requirements:
 - a) A closure seal, or seals, to close the space between the roof edge and tank wall shall be used.
 - b) There shall be no holes, tears, or other openings in the seal or any seal fabric or materials.
 - c) All openings except stub drains shall be equipped with covers, lids, or seals such that:
 - i) The cover, lid, or seal is in the closed position at all times except when in actual use;
 - ii) Automatic bleeder vents are closed at all times except when the roof is floated off or landed on the roof leg supports; and,
 - iii) Rim vents, if provided, are set to open when the roof is being floated off the roof leg supports or at the manufacturer's recommended setting.
- c. The permittee shall not store or allowed to be stored any material in storage tank no. 004 and storage tank no. 321 with a maximum true vapor pressure greater than 7.0 psia at 100°F, at any time. (Installation Permit No. 0007-I002a Condition V.A.1.d)

- d. The emissions from tanks T003, T004 and T321 shall not exceed the following at any time: (§2103.12.a.2.B, Permit 0007-I002 condition no. V.1.c; Installation Permit No. 0007-I002a Condition V.A.1.e)

TABLE V.C-1: Emission Limitations for T003, T004 and T321¹

Pollutant	Tank T003 (tons/yr)	Tank T004 (tons/yr)	Tank T321 (tons/yr)
Volatile Organic Compounds	3.90	2.43	2.42
Ethanol	NA	0.42	0.37
Hazardous Air Pollutants	0.76		

¹A year is described as any consecutive 12-month period.

2. Testing Requirements:

The Department reserves the right to require emissions testing sufficient to assure compliance with the terms and conditions of this permit. Such testing shall be performed in accordance with Site Level Condition IV.13 above entitled “Emissions Testing.” (§2103.12.h.1, Installation Permit No. 0007-I002a Condition V.A.2.c)

3. Monitoring Requirements:

- a. The permittee shall perform routine inspections on the internal floating roofs in T003, T004 and T321 annually according to conditions V.C.3.b.1) through V.C.3.b.4) in order to ensure compliance with Conditions V.C.1.a and V.C.1.b above. (§2105.12.f.1; §63.11092(e)(1); IP No. 0007-I002a Condition V.A.2.a; IP No. 0007-I002a Condition V.A.3; §2102.04.e)
- b. The permittee shall comply with the following for the permanently affixed roofs and internal floating roofs on tanks T003, T004 and T321: (§60.113b(a), Installation Permit No. 0007-I002a Condition V.A.2.b)
- 1) The permittee shall visually inspect the internal floating roof, the primary seal, and the secondary seal (if one is in service), prior to filling the storage vessel with volatile organic liquid. If there are holes, tears, or other openings in the primary seal, the secondary seal, or the seal fabric or defects in the internal floating roof, or both, the owner or operator shall repair the items before filling the storage vessel. (§ 60.113b(a)(1))
 - 2) The permittee shall visually inspect the internal floating roof and primary seal or secondary seal (if one is in service) through manholes and roof hatches on the fixed roof at least once every twelve consecutive months after initial fill. If the internal floating roof is not resting on the surface of the volatile organic liquid inside the storage vessel, or there is liquid accumulated on the roof, or the seal is detached, or there are holes or tears in either tank seal fabric, the permittee shall repair the items or empty and remove the storage vessel from service within 45 days. If a failure that is detected in the vessel during inspections required in this condition cannot be repaired within 45 days and if the vessel cannot be emptied within 45 days, a 30-day extension may be requested from the Department in the inspection report required in Condition V.C.5.b below. Such a request for an extension shall document that alternate storage capacity is unavailable and specify a schedule of actions the company will take that will assure that the control equipment will be repaired, or the vessel will be emptied as soon as possible. (§60.113b(a)(2))

- 3) The permittee shall visually inspect the internal floating roof, primary seal, all gaskets, slotted membranes and sleeve seals (if any) each time tanks T003, T004 or T321 is emptied and degassed. If the internal floating roof has defects, the primary seal has holes, tears, or other openings in the seal or the seal fabric, or any gaskets no longer close off the liquid surfaces from the atmosphere, or any slotted membrane has more than 10 percent open area, the permittee shall repair the items as necessary so that none of the conditions specified in this condition exist before refilling the storage vessel with liquid. In no event shall inspections conducted in accordance with this condition occur at intervals greater than 10 years in the case of vessels conducting the annual visual inspections as specified in Condition V.C.3.b.2) above. (§60.113b(a)(4))
- 4) The permittee shall notify the Department in writing at least 30 days prior to the filling or refilling of tanks T003, T004 or T321 to afford the Department the opportunity to have an observer present. If the inspection required by Condition V.C.3.b.3) above is not planned and the permittee could not have known about the inspection 30 days in advance of refilling the tank, the permittee shall notify the Department at least 7 days prior to the refilling of the storage vessels. Notification shall be made by telephone immediately followed by written documentation demonstrating why the inspection was unplanned. Alternatively, this notification including the written documentation may be made in writing and sent by express mail so that it is received by the Department at least 7 days prior to the refilling. (§60.113b(a)(5))

4. Record Keeping Requirements:

- a. The permittee shall keep and maintain the following data for each subject tank: (§2103.12.h.1, §2103.12.a.2.B, Installation Permit No. 0007-I002a Condition V.A.4.a)
 - 1) Type, amount and period of storage of each volatile organic liquid stored (monthly and 12-month); (§60.116b(c), Permit 0007-I002 condition no. 4.b, §2105.12.f, Installation Permit No. 0007-I002a Condition V.A.4.a.1))
 - 2) Maximum true vapor pressure of the each liquid as stored (monthly); (§60.116b(c), Permit 0007-I002 condition no. 4.b, §2105.12.f, Installation Permit No. 0007-I002a Condition V.A.4.a.2))
 - 3) Readily accessible records, showing the dimension of each subject storage vessel and an analysis showing the capacity of each storage vessel. These records shall be kept for the life of the subject tanks; and (§60.116b(c), Installation Permit No. 0007-I002a Condition V.A.4.a.3))
 - 4) Record of each inspection performed as required by Conditions V.C.3.a, V.C.3.b.1), V.C.3.b.2), and V.C.3.b.3) above. Each record shall identify the storage vessel; on which the inspection was performed and shall contain the date the vessel was inspected and the observed condition of each of the control equipment (seals, internal floating roof, and fittings). (§60.115b(a)(2), Permit 0007-I002 condition no. V.4.a, §2105.12.f.3, Installation Permit No. 0007-I002a Condition V.A.4.a.4))
- b. After installing control equipment in accordance with Condition V.C.6.a below (fixed roof and internal floating roof), the permittee shall meet the following requirements. (§60.115b(1), Installation Permit No. 0007-I002a Condition V.A.4.c)
 - 1) Furnish the Department with a report that describes the control equipment and certifies that the control equipment meets the specifications of Condition V.C.6.a and V.C.3.b.2) above. This

- report shall be an attachment to the notification required by 40 CFR 60.7(a)(3). (§60.115b(a)(1), Permit 0007-I002 condition no. V.5.b)
- 2) Keep a record of each inspection performed as required by Condition V.C.3.b.1), V.C.3.b.2), and V.C.3.b.4) above. Each record shall identify the storage vessel on which the inspection was performed and shall contain the date the vessel was inspected and the observed condition of each component of the control equipment (seals, internal floating roof, and fittings). (§60.115b(a)(2))
 - 3) If any of the conditions described in Condition V.C.3.b.2) above are detected during the annual visual inspection required by Condition V.C.3.b.2) above, a report shall be furnished to the Department within 30 days of the inspection. Each report shall identify the storage vessel, the nature of the defects, and the date the storage vessel was emptied or the nature of and date the repair was made. (§60.115b(a)(3))
- c. The permittee shall keep records as specified in Conditions V.A.4.i through V.A.4.n above and V.C.4.f below. (§63.11087(e), Installation Permit No. 0007-I002a Condition V.A.1.i).
 - d. The permittee shall record all instances of non-compliance with the conditions of this permit and corrective action taken to restore compliance, upon occurrence. (§2103.12.h.1, Installation Permit No. 0007-I002a Condition V.A.4.d)
 - e. All records shall be retained by the facility for at least five (5) years. These records shall be made available to the Department upon request for inspection and/or copying. (§2103.12.j.2, Installation Permit No. 0007-I002a Condition V.A.4.e)
 - f. The permittee shall keep records as specified in §60.115b if the permittee is complying with options 2(a), 2(b), or 2(c) in Table 1 to this subpart, except records shall be kept for at least 5 years. If the permittee is complying with the requirements of option 2(d) in Table 1 to this subpart, the permittee shall keep records as specified in §63.1065. (§63.11094(a), Installation Permit No. 0007-I002a Condition V.A.4.f)

5. Reporting Requirements:

- a. The permittee shall report the following information to the Department within thirty days of the end of each calendar quarter. The reports shall contain all required information for the time period of the report: (§2103.12.h.1, Installation Permit No. 0007-I002a Condition V.A.5.a)
 - 1) Data required to be recorded by Condition V.C.4.a.1) and V.C.4.a.2) above; and
 - 2) Non-compliance information required to be recorded by Condition V.C.4.b above.
- b. If any of the defects described in Condition V.C.3.b.1) above are detected during the annual visual inspection required by Condition V.C.3.b.2) above, a report shall be furnished to the Department within 30 days of the inspection. Each report shall identify the storage vessel, the nature of the defects, and the date the storage vessel was emptied or the nature of and date the repair was made. (§60.115b(a)(3), Permit 0007-I002 condition no. V.5.c, Installation Permit No. 0007-I002a Condition V.A.5.b)
- c. Monthly VOC and HAP emission estimates for the facility shall be submitted to the Department upon request. Emissions estimates shall be based on storage tank emissions using Tanks 4.0 or other EPA approved methodology, 35 mg/l VRU gasoline emissions, 9 mg/l truck loading gasoline emissions and HAP estimations based on speciation data supplied by the manufacturer. (Permit

0007-I001 condition no. 38, Installation Permit No. 0007-I002a Condition V.A.5.c)

- d. The permittee shall submit the applicable notifications as required under V.A.5.e through V.A.5.h above. (§63.11087(d), Installation Permit No. 0007-I002a Condition V.A.1.h)
- e. The permittee shall submit reports as specified in Conditions V.A.5.i through V.A.5.l above. (§63.11087(e), Installation Permit No. 0007-I002a Condition V.A.1.i).
- f. Reporting instances of non-compliance in accordance with Condition V.C.5.a.2) above does not relieve the permittee of the requirement to report breakdowns in accordance with Site Level Condition IV.8 above, if appropriate. (§2103.12.k.1, Installation Permit No. 0007-I002a Condition V.A.5.d)

6. Work Practice Standards:

- a. Tanks T003, T004 and T321 shall be equipped with a fixed roof in combination with an internal floating roof meeting the following specifications: (§60.112b(a)(1), Installation Permit No. 0007-I002a Condition V.A.1.c)
 - 1) The internal floating roof shall rest or float on the liquid surface (but not necessarily in complete contact with it) inside of each tank. The internal floating roof shall be floating on the liquid surface at all times, except during initial fill and during those intervals when the storage vessel is completely emptied or subsequently emptied and refilled. When the roof is resting on the leg supports, the process of filling, emptying, or refilling shall be continuous and shall be accomplished as rapidly as possible. (§60.112b(a)(1)(i))
 - 2) Each internal floating roof shall be equipped with one of the following closure devices between the wall of the storage vessel and the edge of the internal floating roof. (§60.112b(a)(1)(ii))
 - a) A foam or liquid-filled seal mounted in contact with the liquid (liquid-mounted seal). A liquid-mounted seal means a foam or liquid-filled seal mounted in contact with the liquid between the wall of the storage vessel and the floating roof continuously around the circumference of the tank. (§60.112b(a)(1)(ii)(A))
 - b) Two seals mounted above the other so that each forms a continuous closure that completely covers the space between the wall of each tank and the edge of the internal floating roof. The lower seal may be vapor-mounted, but both shall be continuous. (§60.112b(a)(1)(ii)(B))
 - c) A mechanical shoe seal shall be a metal sheet held vertically against the wall of each storage tank by springs or weighted levers and shall be connected by braces to the floating roof. A flexible coated fabric (envelope) shall span the annular space between the metal sheet and the floating roof. (§60.112b(a)(1)(ii)(C))
 - 3) Each opening in a non-contact internal floating roof except for automatic bleeder vents (vacuum breaker vents) and the rim space vents is to provide a projection below the liquid surface. (§60.112b(a)(1)(iii))
 - 4) Each opening in the internal floating roof except for leg sleeves, automatic bleeder vents, rim space vents, column wells, ladder wells, sample wells, and stub drains is to be equipped with a cover or lid which is to be maintained in a closed position at all times (i.e., no visible gap) except when the device is in actual use. The cover or lid shall be equipped with a gasket. Covers on each access hatch and automatic gauge float well shall be bolted except when they are in use. (§60.112b(a)(1)(iv))
 - 5) Automatic bleeder vents shall be equipped with a gasket and are to be closed at all times when each roof is floating except when the roof is being floated off or is being landed on the roof leg

- supports. (§60.112b(a)(1)(v))
- 6) Rim space vents shall be equipped with a gasket and are to be set to open only when the internal floating roof is not floating or at the manufacturer's recommended setting. (§60.112b(a)(1)(vi))
 - 7) Each penetration of each internal floating roof for the purpose of sampling shall be a sample well. Each sample well shall have a slit fabric cover that covers at least 90 percent of the opening. (§60.112b(a)(1)(vii))
 - 8) Each penetration of each internal floating roof that allows for passage of a column supporting the fixed roof shall have a flexible fabric sleeve seal or a gasketed sliding cover. (§60.112b(a)(1)(viii))
 - 9) Each penetration of each internal floating roof that allows for passage of a ladder shall have a gasketed sliding cover. (§60.112b(a)(1)(ix), Permit 0007-I002 condition no. V.1.a.9)
- b. Available data on the storage temperature may be used to determine the maximum true vapor pressure as determined below. (Installation Permit No. 0007-I002a Condition V.A.4.b)
- 1) For vessels operated above or below ambient temperatures, the maximum true vapor pressure is calculated based upon the highest expected calendar-month average of the storage temperature. For vessels operated at ambient temperatures, the maximum true vapor pressure is calculated based upon the maximum local monthly average ambient temperature as reported by the National Weather Service. (§ 60.116b(e)(1))
 - 2) For crude oil or refined petroleum products the vapor pressure may be obtained by the following: (§ 60.116b(e)(2))
 - a) Available data on the Reid vapor pressure and the maximum expected storage temperature based on the highest expected calendar-month average temperature of the stored product may be used to determine the maximum true vapor pressure from nomographs contained in API Bulletin 2517 (incorporated by reference—see 40 CFR 60.17), unless the Department specifically requests that the liquid be sampled, the actual storage temperature determined, and the Reid vapor pressure determined from the sample(s). (§ 60.116b(e)(2)(i))
 - b) The true vapor pressure of each type of crude oil with a Reid vapor pressure less than 13.8 kPa or with physical properties that preclude determination by the recommended method is to be determined from available data and recorded if the estimated maximum true vapor pressure is greater than 3.5 kPa. (§ 60.116b(e)(2)(ii))
 - 3) For other liquids, the vapor pressure: (§ 60.116b(e)(3))
 - a) May be obtained from standard reference texts, or (§ 60.116b(e)(3)(i))
 - b) Determined by ASTM Method D2879–83 (incorporated by reference—see 40 CFR 60.17); or (§ 60.116b(e)(3)(ii))
 - c) Measured by an appropriate method approved by the Department; or (§60.116b(e)(3)(iii))
 - d) Calculated by an appropriate method approved by the Department. (§60.116b(e)(3)(iv))
- c. The permittee shall meet the following emission limit and management practices: (§63.11087.a, Table 1 to Subpart BBBBBB of Part 63, Installation Permit No. 0007-I002a Condition V.A.1.f)
- 1) Equip each internal floating roof gasoline storage tank according to the requirements in §60.112b(a)(1), except for the secondary seal requirements under §60.112b(a)(1)(ii)(B) and the requirements in §60.112b(a)(1)(iv) through (ix); and
 - 2) Equip and operate each internal and external floating roof gasoline storage tank according to the applicable requirements in §63.1063(a)(1) and (b), and equip each external floating roof gasoline storage tank according to the requirements of §63.1063(a)(2) if such storage tank does not currently meet the requirements of §63.1063(a)(1).

- d. The permittee shall comply with the applicable testing and monitoring requirements specified in Condition V.C.2 and V.C.3 above. (§63.11087.c; Installation Permit No. 0007-I002a Condition V.A.1.g)
- e. If the permittee's gasoline storage tank is subject to, and complies with, the control requirements of 40 CFR part 60, subpart Kb, the permittee's storage tank will be deemed in compliance with Conditions V.C.5.d, V.C.5.e, V.C.6.c, V.C.6.d above. The permittee shall report this determination in the Notification of Compliance Status report under V.A.5.f above. (§63.11087(f), Installation Permit No. 0007-I002a Condition V.A.1.j).

7. Additional Requirements

None except as provided elsewhere

DRAFT

D. Storage Tank No. 6

Process Description: Above ground storage tank
Facility ID: Tank No. 6
Capacity: 1,065,204 gallons
Raw Materials: Gasoline
Control Device(s): Internal floating roofs

The permittee is also subject to the following conditions:

1. Restrictions

- a. Tank No. 6 shall be equipped with a suspended internal floating roof, and the vapor pressure of the volatile organic compounds stored shall be 6.37 psia or less under actual storage conditions. (§2105.12.b, Installation Permit No. 0007-I003 Condition V.A.1.a)
- b. Emissions from tank No.6 shall not exceed the following at any time (§§2103.12.a.2.B; Installation Permit No. 0007-I003 Condition V.A.d):

Pollutant	Total Emissions, tons/yr ¹
Volatile Organic Compounds	1.95
Total Hazardous Air Pollutant	0.10

¹A year is defined as any 12 consecutive months.

2. Testing Requirements

The Department reserves the right to require emissions testing sufficient to assure compliance with the terms and conditions of this permit. Such testing shall be performed in accordance with Site Level Condition IV.13 above entitled “Emissions Testing.” (§2103.12.h.1, Installation Permit No. 0007-I003 Condition V.A.2)

3. Monitoring Requirements

- a. The permittee shall perform routine inspections on the internal floating roof in tank No.6 annually in order to ensure compliance with Conditions V.D.1.a, V.D.6.a and V.D.6.b below. (§2105.12.f.1, Installation Permit No. 0007-I003 Condition V.A.3.a)
- b. The permittee shall comply with the following for the permanently affixed roofs and internal floating roof on tank No.6: (§60.113b(a); §63.11087(c); §63.11092(e), Installation Permit No. 0007-I003 Condition V.A.3.b)
 - 1) The permittee shall visually inspect the internal floating roof, the primary seal, and the secondary seal, prior to filling the storage vessel with volatile organic liquid. If there are holes, tears, or other openings in the primary seal, the secondary seal, or the seal fabric or defects in the internal floating roof, or both, the owner or operator shall repair the items before filling the storage vessel. (§ 60.113b(a)(1))
 - 2) The permittee shall visually inspect the internal floating roof and primary seal or secondary seal (if one is in service) through manholes and roof hatches on the fixed roof at least once

every 12 consecutive months after initial fill. If the internal floating roof is not resting on the surface of the volatile organic liquid inside the storage vessel, or there is liquid accumulated on the roof, or the seal is detached, or there are holes or tears in either tank seal fabric, the permittee shall repair the items or empty and remove the storage vessel from service within 45 days. If a failure that is detected in the vessel during inspections required in this condition cannot be repaired within 45 days and if the vessel cannot be emptied within 45 days, a 30-day extension may be requested from the Department in the inspection report required in Condition V.D.5.b below. Such a request for an extension must document that alternate storage capacity is unavailable and specify a schedule of actions the company will take that will assure that the control equipment will be repaired, or the vessel will be emptied as soon as possible. (§60.113b(a)(2))

- 3) The permittee shall visually inspect the internal floating roof, primary seal, all gaskets, slotted membranes and sleeve seals (if any) each time tank No.6 is emptied and degassed. If the internal floating roof has defects, the primary seal has holes, tears, or other openings in the seal or the seal fabric, or any gaskets no longer close off the liquid surfaces from the atmosphere, or any slotted membrane has more than 10 percent open area, the permittee shall repair the items as necessary so that none of the conditions specified in this condition exist before refilling the storage vessel with liquid. In no event shall inspections conducted in accordance with this condition occur at intervals greater than 10 years in the case of vessels conducting the annual visual inspections as specified in Condition V.D.3.b.2) above. (§60.113b(a)(4))
- 4) The permittee shall notify the Department in writing at least 30 days prior to the filling or refilling of tank No.6 to afford the Department the opportunity to have an observer present. If the inspection required by condition V.D.3.b.3) above is not planned and the permittee could not have known about the inspection 30 days in advance of refilling the tank, the permittee shall notify the Department at least 7 days prior to the refilling of the storage vessels. Notification shall be made by telephone immediately followed by written documentation demonstrating why the inspection was unplanned. Alternatively, this notification including the written documentation may be made in writing and sent by express mail so that the Department receives it at least 7 days prior to the refilling. (§60.113b(a)(5))

4. Record Keeping Requirements

- a. The permittee shall keep and maintain the following data for the subject tank: (Installation Permit No. 0007-I003 Condition V.A.4.a)
 - 1) Type, amount and period of storage of each volatile organic liquid stored (monthly and 12-month); (§60.116b(c); §2105.12.f, Installation Permit No. 0007-I003 Condition V.A.4.a.1))
 - 2) Maximum true vapor pressure of the each liquid as stored (monthly); (§60.116b(c), §2105.12.f, Installation Permit No. 0007-I003 Condition V.A.4.a.2))
 - 3) Readily accessible records, showing the dimension of subject storage vessel and an analysis showing the capacity of storage vessel. These records shall be kept for the life of the subject tank; and (§60.116b(c), Installation Permit No. 0007-I003 Condition V.A.4.a.3))
 - 4) Record of each inspection performed as required by Conditions V.D.3.b.1), V.D.3.b.2) and V.D.3.b.3) above. Each record shall identify the storage vessel; on which the inspection was performed and shall contain the date the vessel was inspected and the observed condition of

- each of the control equipment (seals, internal floating roof, and fittings). (§60.115b(a)(2); §63.11094(a); §2105.12.f.3, Installation Permit No. 0007-I003 Condition V.A.4.a.4))
- 5) The reason, date, duration and estimated emissions for each tank landing. (Installation Permit No. 0007-I003 Condition V.A.4.a.5))
- b. Available data on the storage temperature may be used to determine the maximum true vapor pressure as determined below. (Installation Permit No. 0007-I003 Condition V.A.4.b)
- 1) The maximum true vapor pressure shall be calculated based upon the maximum local monthly average ambient temperature as reported by the National Weather Service. (§60.116b(e)(1), Installation Permit No. 0007-I003 Condition V.A.4.b.1)
- 2) For crude oil or refined petroleum products the vapor pressure may be obtained by the following: (§60.116b(e)(2), Installation Permit No. 0007-I003 Condition V.A.4.b.2))
- a) Available data on the Reid vapor pressure and the maximum expected storage temperature based on the highest expected calendar-month average temperature of the stored product may be used to determine the maximum true vapor pressure from monographs contained in API Bulletin 2517 (incorporated by reference-see 40 CFR 60.17), unless the Administrator specifically requests that the liquid be sampled, the actual storage temperature determined, and the Reid vapor pressure determined from the sample(s). (§60.116b(e)(2)(i), Installation Permit No. 0007-I003 Condition V.A.4.b.2)a))
- b) The true vapor pressure of each type of crude oil with a Reid vapor pressure less than 13.8 kPa or with physical properties that preclude determination by the recommended method is to be determined from available data and recorded if the estimated maximum true vapor pressure is greater than 3.5 kPa. (§60.116b(e)(2)(ii), Installation Permit No. 0007-I003 Condition V.A.4.b.2)b))
- c. After installing control equipment in accordance with condition V.D.6.b below (fixed roof and internal floating roof), the permittee shall meet the following requirements: (§ 60.115b(1); §63.11094(a), Installation Permit No. 0007-I003 Condition V.A.4.c)
- 1) Furnish the Administrator and the Department with a report that describes the control equipment and certifies that the control equipment meets the specifications of Condition V.D.6.b and V.D.3.b.1) above. This report shall be an attachment to the notification required by §60.7(a)(3). (§60.115b(a)(1), Installation Permit No. 0007-I003 Condition V.A.4.c.1))
- 2) Keep a record of each inspection performed as required by conditions V.D.3.b.1), V.D.3.b.2), and V.D.3.b.3) above. Each record shall identify the storage vessel on which the inspection was performed and shall contain the date the vessel was inspected and the observed condition of each component of the control equipment (seals, internal floating roof, and fittings). (§60.115b(a)(2), Installation Permit No. 0007-I003 Condition V.A.4.c.2))
- 3) If any of the conditions described in Condition V.D.3.b.2) above are detected during the annual visual inspection, a report shall be furnished to the Administrator and the Department within 30 days of the inspection. Each report shall identify the storage vessel, the nature of the defects, and the date the storage vessel was emptied or the nature of and date the repair was made. (§ 60.115b(a)(3), Installation Permit No. 0007-I003 Condition V.A.4.c.3))

- d. The permittee shall record all instances of non-compliance with the conditions of this permit and corrective action taken to restore compliance, upon occurrence. (§2103.12.h.1, Installation Permit No. 0007-I003 Condition V.A.4.d)
- e. All records shall be retained by the facility for at least five (5) years. These records shall be made available to the Department upon request for inspection and/or copying. (§2103.12.j.2; Installation Permit No. 0007-I003 Condition V.A.4.e)

5. Reporting Requirements

- a. The permittee shall report the following information to the Department within thirty days of the end of each calendar quarter. The reports shall contain all required information for the time period of the report: (§2103.12.h.1; Installation Permit No. 0007-I003 Condition V.A.5.a)
 - 1) Data required to be recorded by condition V.D.4.a.1) and V.D.4.a.2) above; and
 - 2) Non-compliance information required to be recorded by V.D.4.d above.
- b. If any of the defects described in condition V.D.3.b.1) above are detected during the annual visual inspection, a report shall be furnished to the Department within 30 days of the inspection. Each report shall identify the storage vessel, the nature of the defects, and the date the storage vessel was emptied or the nature of and date the repair was made. (§60.115b(a)(3); §63.11095(a)(1), Installation Permit No. 0007-I003 Condition V.A.5.b)
- c. Monthly VOC and HAP emission estimates for the facility shall be submitted to the Department upon request. Emissions estimates shall be based on Tanks 4.0 or other Department approved methodology for storage tank emissions, the VRU emission rate from the most recent approved stack test in mg/l of gasoline emissions for each VRU, 6 mg/l for tank truck fugitive loading gasoline emissions and Department approved HAP speciation for HAP estimations. (§2102.04.b.6, Installation Permit No. 0007-I003 Condition V.A.5.c)
- d. Reporting instances of non-compliance in accordance with condition V.D.5.a above, does not relieve the permittee of the requirement to report breakdowns in accordance with Site Level Condition IV.8 above if appropriate. (§2103.12.k.1; Installation Permit No. 0007-I003 Condition V.A.5.d)

6. Work Practice Standards:

- a. Tanks No.6 shall be fitted with a primary seal and shall comply with all of the following equipment requirements for internal floating roofs: (§2105.12.c, Installation Permit No. 0007-I003 Condition V.A.1.b)
 - 1) A closure seal, or seals, to close the space between the roof edge and tank wall shall be used.
 - 2) There shall be no holes, tears, or other openings in the seal or any seal fabric or materials.
 - 3) All openings except stub drains shall be equipped with covers, lids, or seals such that:
 - a) The cover, lid, or seal is in the closed position at all times except when in actual use; and
 - b) Rim vents, if provided, are set to open when the roof is being floated off the roof leg supports or at the manufacturer's recommended setting.
- b. Tank No.6 shall also be equipped with a fixed roof in combination with an internal floating roof meeting the following specifications: (§60.112b(a)(1); §63.11082(a); Installation Permit No. 0007-

I003 Condition V.A.1.c)

- 1) The internal floating roof shall rest or float on the liquid surface (but not necessarily in complete contact with it) inside of each tank. The internal floating roof shall be floating on the liquid surface at all times, except during initial fill and during those intervals when the storage vessel is completely emptied or subsequently emptied and refilled. When the roof is resting on the leg supports, the process of filling, emptying, or refilling shall be continuous and shall be accomplished as rapidly as possible. (§60.112b(a)(1)(i))
- 2) The internal floating roof shall be equipped with one of the following closure devices between the wall of the storage vessel and the edge of the internal floating roof. (§60.112b(a)(1)(ii))
 - a) A foam or liquid-filled seal mounted in contact with the liquid (liquid-mounted seal). A liquid-mounted seal means a foam or liquid-filled seal mounted in contact with the liquid between the wall of the storage vessel and the floating roof continuously around the circumference of the tank. (§60.112b(a)(1)(ii)(A))
 - b) A mechanical shoe seal shall be a metal sheet held vertically against the wall of each storage tank by springs or weighted levers and shall be connected by braces to the floating roof. A flexible coated fabric (envelope) shall span the annular space between the metal sheet and the floating roof. (§60.112b(a)(1)(ii)(C))
- 3) Each opening in a non-contact internal floating roof except for automatic bleeder vents (vacuum breaker vents) and the rim space vents is to provide a projection below the liquid surface. (§60.112b(a)(1)(iii))

7. Additional Requirements:

None except as provided elsewhere.

VI. MISCELLANEOUS**A. Two horizontal aboveground storage tanks, one 20,000 gallons, T005 and one 10,000 gallons, T007:****1. Restrictions:**

- a. Storage tanks T005 and T007 shall not store a volatile organic liquid with a vapor pressure, as stored, in excess of 0.5 psia at any time. (§2103.12.a.2.B)
- b. Volatile organic compounds whose storage temperature is governed by ambient weather conditions, the vapor pressure under actual storage conditions shall be determined using a temperature which is representative of the average storage temperature for the hottest month of the year in which such storage takes place. (§2105.12.d)

2. Record keeping:

- a. The permittee shall maintain, for each storage tank, a record of the material stored, the period of storage and the maximum true vapor pressure of the material during the respective storage period for the storage tanks. (§2103.12.a.2.B)

B. Three 20,000-gallon frac tanks:**1. Record keeping:**

- a. The permittee shall record and maintain the type and amount of petroleum liquids collected in the frac tanks (occurrence and annual) during routine maintenance operations of the pipeline leading to the terminal. (§2103.12.a.2.B)
- b. The permittee shall report the type and amount of petroleum liquids collected in the frac tanks to the Department on an annual basis. The report shall be made with the corresponding quarterly report required in sections V.A.5, V.B.5, and V.C.5 above of this permit. (§2103.12.a.2.B)

C. One 60,000-gallon butane tank:**1. Record keeping:**

- a. The permittee shall record and maintain the following records for the subject tank: (§2103.12.a.2.B)
 - 1) The number of tanker trucks transferring liquefied petroleum gas (butane) into the storage tank (daily, monthly and twelve months rolling) and a chemical analysis of the butane (percentage) in every tanker. (§2103.12.a.2.B)
 - 2) The permittee shall maintain a record of the amount of butane blended (daily, monthly and twelve months rolling), operating pressure of the butane tank (daily) and the activation of the pressure relief system (occurrence). (§2103.12.a.2.B)
 - 3) The permittee shall report the number of tanker trucks that transfer butane into the storage,

amount of butane blended and activation of the pressure relief system (occurrence) to the Department on a quarterly basis. The report shall be made with the corresponding quarterly reports required in sections V.A.5, V.B.5, and V.C.5 above of this permit. (§2103.12.a.2.B)

D. Two oil water separators, one underground 10,000 gallon and one 120,000 gallons opened top:

Use of the subject oil/water separators shall be limited to runoff from the terminal area only.

E. One 2.01 MMBtu/hr boiler fired with natural gas:

1. Restrictions:

- a. The permittee shall not operate or allow to be operated the 2.01 MMBtu/hr boiler in such a manner that the emissions of particulate matter from the boiler exceeds 0.008 pounds per MMBtu of actual heat input, at any time while combusting natural gas. (§2104.02.a.1)
- b. At no time shall the permittee operate the subject boiler using any fuel other than natural gas (§2103.12.a.2.B)
- c. Natural gas usage for the subject boiler shall not exceed the following maximum potential usage of 1,971 scf/hr and 17.26 million scf/yr, based on a heating value of 1,020 Btus/scf, at any time: (§2103.12.a.2.B)
- d. Except as provided for by Article XXI 2108.01.d pertaining to cold start, the permittee shall not operate, or allow to be operated, the subject units in such a manner that the opacity of visible emissions from any unit exceeds 0% at any time. (§2103.12.a.2.B)

2. Recordkeeping:

- a. The permittee shall record and maintain the following records for the subject units: (§2103.12.a.2.B)
 - 1) The amount of natural gas used. (monthly, 12-month)
 - 2) Episodes of non-compliance with conditions of Section VI.E of this permit and corrective actions taken to restore compliance.
 - 3) All cold start information.
- b. All records shall be kept on a monthly basis and shall be retained by the facility for at least five (5) years. These records shall be made available to the Department upon request for inspection and/or copying.

3. Reporting:

- a. The permittee shall report the monthly records of Condition VI.E.2.a above, to the Department annual basis. This annual report shall be made with the corresponding quarterly report required in sections V.A.5, V.B.5, and V.C.5 above of this permit. (§2103.12.a.2.B)
- b. Reporting instances of non-compliance in accordance with Condition VI.E.2.a.2) above, does not relieve the permittee of the requirement to report breakdowns in accordance with Site Level

Condition IV.8 above, if appropriate. (§2103.12.a.2.B)

- c. Until terminated by written notice from the Department, the requirement for the permittee to report cold starts 24 hours in advance in accordance with §2108.01.d. is waived for the subject units. (§2108.01.d)

DRAFT

VII. ALTERNATIVE OPERATING SCENARIOS

There are no alternative operating scenarios for this terminal.

DRAFT

VIII. EMISSIONS LIMITATIONS SUMMARY

The combined emissions from the vapor recovery unit and storage tanks T001, T002, T003, T004, T321 and T006 shall not exceed the following limitations at any time:

TABLE VIII-1: Emission Limitations

POLLUTANT	ANNUAL EMISSION LIMIT (tons/year)*
VOCs	86.95
Ethanol	0.79
HAPs	6.54

*A year is defined as any consecutive 12-month period.

DRAFT